

Package hvfloat

Rotating and scaling of objects and captions ver 2.17


Herbert Voß*

October 31, 2020

The package hvfloat defines a macro to place objects and captions of floats in different positions with different rotating angles.

All objects and captions are framed on the first pages, which is only for some demonstration here and has no additional sense!

To compare the place of the definition of the floating objects in the source and the output a marginnote `\float` is set into the margin. This is done also only for demonstration!

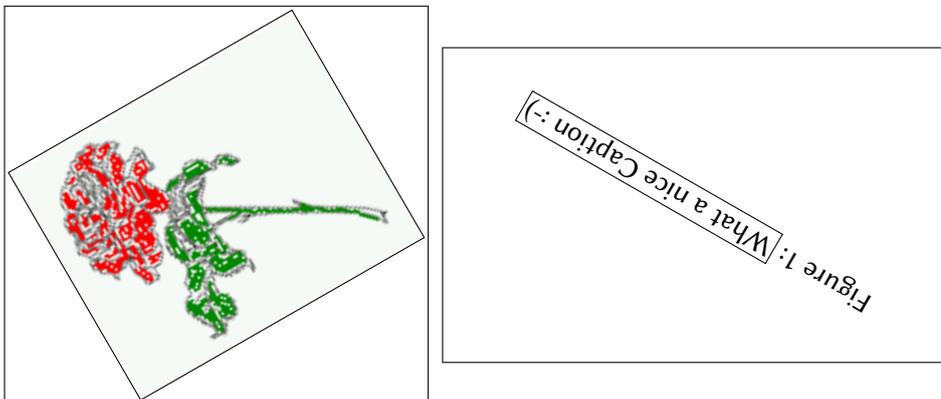

*hvoss@tug.org

Contents

1	The package options	7
2	The Macros and optional arguments	7
3	The default use of floating environments	9
4	Caption width	10
4.1	Default – natural width	10
4.2	Relative linewidth	11
4.3	Identical object and caption width	13
4.4	caption width to height of the object	13
5	Caption left or right of the object	13
5.1	Caption right with specific length	14
5.2	Caption left and rotated	14
6	Caption inner or outer	15
7	Vertical Position of the Caption	18
8	Caption format	19
9	Horizontal Position of the Float	20
10	Wide floats	21
11	The star version <code>\hvFloat*</code>	24
12	Full Page Width in Landscape Mode	24
13	The <code>nonFloat</code> Option	28
14	Tabulars as Objects	29
15	Text and objects	29
16	Environment <code>hvFloatEnv</code>	31
17	Full page objects in onecolumn mode	32
17.1	Using the <code>textarea</code>	32
17.1.1	Using the default or <code>capPos=before</code>	32
17.1.2	Using <code>capPos=after</code>	35
17.1.3	Using <code>capPos=evenPage</code> — caption on an even page	36
17.1.4	Using <code>capPos=oddPage</code> — caption on an odd page	37

17.1.5	Using capPos=inner or capPos=outer — caption on the inner or outer side	37
17.2	Using the paper size	38
17.3	Multifloats	39
18	Subfloat page	41
19	Full page objects in twocolumn mode	44
19.1	Default setting	44
19.1.1	Using capPos=after	45
19.1.2	Using capPos=evenPage — caption on an even page	48
19.1.3	Using capPos=oddPage — caption on an odd page	49
19.1.4	Using capPos=inner — caption in the inner column	50
19.1.5	Using capPos=outer — caption on the outer column	51
19.2	Using full page in twocolumn mode	52
19.3	Multifloats	53
20	Subfloat page	54
21	References to the page	57
22	Defining a style	57
23	Global float setting	58
24	The Package Source	63

List of Tables

1	The Caption without sense ...	7
2	The optional keywords for the macro <code>\hvFloat</code>	8
3	With the only Option <code>capPos=top</code> to place the caption on top of the table, which is often the default.	10
4	Demonstration of the <code>use0Box</code> Parameter	30
5	Demonstration of the <code>use0Box</code> Parameter	30
6	A caption for a nice table	31
7	A caption for a nice table	32
8	Valid optional arguments for a full page object.	34

List of Figures

1	1
2	Without any keywords (only the <code>fbox</code> package option)	9
3	Default caption width setting, which is the natural width with respect to the current linewidth.	11
4	Caption right beside with a <i>natural</i> width, which is given by the width of the object, the separation between object and caption, and the current linewidth.	11
5	Caption below with a width of 0.9 of the current line width (column width), which is in this special case 376.4258pt. Divide it by 28.82 to get cm.	12
6	Caption right beside with a width setting of 0.9\linewidth which is too big for this example and therefore corrected by the macro to the maximal width.	12
7	Caption below with a width of the given object which may be a problem if it is a very small object.	13
8	Caption beside with a width of the given object height which may be a problem if it is a very small object.	13
9	Caption beside object and vertically centered	14
10	Centered Caption beside Object	15
11	Caption vertically centered right beside the float with a caption width of the height of the image and a rotation of the caption and the object.	15
12	Centered Caption on the inner side	16
13	Centered Caption on the inner side	17
14	Centered Caption beside Object	17
15	Centered Caption beside Object	17
16	Caption at bottom right beside the float	18
17	Caption at top left beside the float	18
18	Caption centered right beside the float	19

19	Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language. . . .	19
20	Caption at top right beside the float and object position left	20
21	Caption at top right beside the float and object position left	21
22	Caption at top left beside the float and object position right	21
23	Caption at top right beside the float and object position left and the option wide.	22
24	Caption at top left beside the object and object position left and the option wide.	22
25	Caption at top and inner beside the float and object position right and the option wide.	23
26	Caption at top inner beside the float and object position right and the option wide.	23
27	Caption at top inner beside the float and object position right and the option wide.	24
28	Output of default1s2c (pages 2 –5)	24
29	Object and Caption in landscape mode	26
30	Rotated Caption in Landscape	27
31	Nonfloat Captions	28
32	Output of fullpage1s2c (pages 1–8)	33
33	Output of default1s1c (pages 2–9)	34
34	Output of after1s1c (pages 2–9)	35
35	Output of even1s1c (pages 2–9)	36
36	Output of odd1s1c (pages 2–9)	37
37	Output of paper-default1s1c (pages 2–9)	38
38	Output of paper-after1s1c (pages 2–9)	39
39	Output of multi-default1s1c (pages 4–11)	40
40	Output of multi-after1s1c (pages 4–11)	41
41	Output of sub-default1s1c (pages 4–11)	43
42	Output of sub-after1s1c (pages 4–11)	43
43	Output of default2s2c (pages 2–9)	44
44	Output of left2s2c (pages 2–9)	45
45	Output of after2s2c (pages 2–9)	46
46	Output of right2s2c (pages 2–9)	47
47	Output of even2s2c (pages 2–9)	48
48	Output of odd2s2c (pages 2–9)	49
49	Output of inner2s2c (pages 2–9)	50
50	Output of outer2s2c (pages 2–9)	51
51	Output of paper-default2s2c (pages 2–9)	52
52	Output of paper-inner2s2c (pages 2–9)	53
53	Output of multi-default2s2c (pages 2–9)	54

List of Figures

54	Output of multi-inner2s2c (pages 2-9)	55
55	Output of sub-default2s2c (pages 2-9)	56
56	Output of sub-after2s2c (pages 2-9)	56
57	Caption at bottom right beside the float with a caption width of 0.5\columnwidth	58
58	A float which needs the complete paper width and height.	58

1 The package options

- `fbox` The objects and captions are put into a `\fbox` command, like in this documentation. This doesn't make real sense and is only for some demonstration useful or for locating problems if images seems to have too much whitespace.
- `hyperref` Load package `hyperref`.

The length `\belowcaptionskip` is set by \LaTeX to 0pt and changed in `hvfloat` to the same value than `\abovecaptionskip`. This length can be changed to another value in the usual way with `\setlength` or `\addtolength`.

The following packages are loaded by `hvfloat` and the optional argument `hypcap` is passed to the packages `caption` and `subcaption`:

`caption`, `subcaption`, `atbegshi`, `expl3`, `multido`, `graphicx`, `xkeyval`, `ifoddpage`, and `afterpage`.

2 The Macros and optional arguments

The syntax for the macros and `\setDefault`s, `\hvSet`, and `\hvFloat` is

```
\hvset{key=value list}
\setDefault
\hvFloat* [Options] + {float type}{floating object}[short caption] {long caption}{label}
```

The star version is explained in section [11 on page 24](#) and [19.2 on page 52](#) and the optional `+` is explained in section [17.3 on page 39](#).

`\hvSet` allows the global setting of keywords and `\setDefault`s sets all keywords to its default value as shown in [Table 2 on the next page](#).

If `\hvFloat` has an empty second parameter `<float type>`, then `\hvFloat` switches by default to a nonfloat (see [table 2](#)) object, which is not important for the user. All other parameters may also be empty and the short caption as second optional parameter missing. This one is as usual the caption for the `\listoffigures`.

There are some more macros defined, more or less for internally use in `hvfloat`, but they can be used for own purposes.

```
\figcaption[short caption text] {caption text}
\tabcaption[short caption text] {caption text}
```

They are used for the `nonFloat` keyword, where these macros write captions in the same way but outside of a float environment. The default caption cannot be used here. It is no problem to use the `\tabcaption` command to place a caption anywhere, like here in an inlined mode:

Table 1: A Caption without any sense and any object

A label can be put inside the argument or after the command in the usual way, so that a reference to the not existing [table 2](#) is no problem.

2 The Macros and optional arguments

[...] It is no problem to use the `\verb|\tabcaption|` command to place a caption anywhere, like here in an `inlined` mode: `\tabcaption[The Caption without sense ...]{A Caption without any sense and any object}\label{dummy}` A label can be put inside the argument or after the command in the usual way, so that a reference to the not existing table-`\ref{dummy}` is no problem.

With the macro `\defhvstyle` one can define a style which can be used instead of the individual setting:

```
\defhvstyle{name}{setting}
```

Internally the style is saved in a macro named `\hv@<name>`.

There are the following keywords:

Table 2: The optional keywords for the macro `\hvFloat`

Keyword	Default	Description
<code>floatPos</code>	<code>htb</code>	This is <i>not</i> the same default placement setting like the one from the floats.
<code>rotAngle</code>	<code>0</code>	The value for the angle if both, the object and the caption should be rotated in the same way.
<code>capWidth</code>	<code>n</code>	The width of the caption. Can be <code>»n«</code> like a natural width, <code>»w«</code> for the width of the object, <code>»h«</code> for the height of the object, or a scale for <code>\columnwidth</code> .
<code>capAngle</code>	<code>0</code>	The value for the angle if the caption should be rotated. Counted anti clockwise.
<code>capPos</code>	<code>before</code>	The position of the caption relative to the object. Possible values are <i>before: always</i> before (left) from the object. <i>left: always</i> before (left) from the object, but on the <i>same page</i> in twocolumn mode. <i>after: always</i> after (right) from the object. <i>right: always</i> after (right) from the object, but on the <i>same page</i> in twocolumn mode. <i>inner:</i> in twoside mode always typeset at the inner margin. <i>outer:</i> in twoside mode always typeset at the outer margin. <i>evenPage:</i> in twoside mode with fullpage objects always on an even page. <i>oddPage:</i> in twoside mode with fullpage objects always on an odd page.
<code>capVPos</code>	<code>c</code>	This is only important for <code>capPos=left right</code> . Only in this case the caption can vertically placed at the bottom, center and top.
<code>objectPos</code>	<code>center</code>	The horizontal placement of the object relative to the document. Possible values are (l)eft (c)enter (r)ight .
<code>objectAngle</code>	<code>0</code>	The value for the angle if the object should be rotated. Counted anti clockwise.

<i>Keyword</i>	<i>Default</i>	<i>Description</i>
floatCapSep	5pt	The additional width between the object and a left or right placed caption.
use0Box	false	Instead of passing the object as parameter to the <code>\hvFloat</code> , the contents maybe saved in the box <code>\hv0Box</code> . With <code>use0Box=true</code> the contents of this box will be used.
nonFloat	false	The object isn't put in a floating environment. It is printed as standard text with an additional caption. The float counters are increased as usual and can be referenced.
wide	false	The float can use <code>\textwidth+\marginparwidth</code> as horizontal width.
objectFrame	false	put a frame with no separation around the float object.
style	-	Use a defined style
capFormat	-	Define formatting options for <code>\caption</code> (see documentation of package <code>caption</code>).
subcapFormat	-	Define formatting options for <code>\subcaption</code> .

3 The default use of floating environments

In this case there is no essential difference to the well known figure or table environment, f.ex.:

```
\begin{figure}
... object ...
\caption{...}% caption below the object
\end{figure}
```

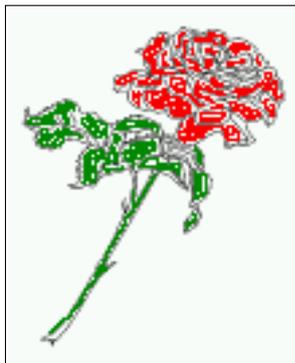


Figure 2: Without any keywords (only the `fbox` package option)

Code for figure 2:

```
\hvFloat{figure}{\includegraphics{images/rose}}{Without any keywords (only the \texttt{fbox}
package option)}{fig:0}
```

Code for table 3:

`float`

4 Caption width

Table 3: With the only Option `capPos=top` to place the caption on top of the table, which is often the default.

Name	Type	Description
<code>\hvFloat</code>	command	places object and caption in different ways
<code>hvFloatEnv</code>	environment	places object and caption exactly Here
<code>\figcaption</code>	command	writes a figure caption in a non floating environment
<code>\tabcaption</code>	command	writes a table caption in a non floating environment
<code>\setDefault</code>	command	sets all options to the defaults
<code>\defhvstyle</code>	command	define a user style

```

\hvFloat[capPos=top]{table}{%
\begin{tabularx}{\textwidth}{>{\ttfamily}l|l|X}
  \rmfamily Name & Type & Description\\\hline
  \CMD{hvFloat} & command & places object and caption in different ways\\
  hvFloatEnv & environment & places object and caption exactly Here\\
  \CMD{figcaption} & command & writes a figure caption in a non floating environment\\
  \CMD{tabcaption} & command & writes a table caption in a non floating environment\\
  \CMD{setDefault} & command & sets all options to the defaults\\
  \CMD{defhvstyle} & command & define a user style
\end{tabularx}}%
{With the only Option \texttt{capPos=top} to place the caption on top of the table, which is often
  the default.}%
{tab:0}

```

See section 14 for some more informations about tabulars as objects.

4 Caption width

4.1 Default – natural width

The default setting is the natural width of a paragraph with respect to the current linewidth or columnwidth for a caption below or above an object. It behaves in the same way as a caption set by one of the default floating environments like `figure` or `table`:

```

\hvFloat[floatPos=!htb]{figure}{\includegraphics{images/rose}}%
  {Default caption width setting, which is the natural width with respect to the current linewidth
  .}{fig:width0}

```

float!

For the following examples the package option `fbox` is disabled. All frames are now set with the macro `\frame` or the optional keyword `objectFrame`.

For a caption beside an object, the *natural* caption width (without the optional argument `wide`) is given by the current linewidth minus the width of the object and the space between object and caption, which is set by `floatCapSep` (see Table 2 on page 8).

```

\hvFloat[floatPos=!htb, capPos=after, objectFrame]{figure}{\includegraphics[scale=1.5]{images/rose}}
  %

```

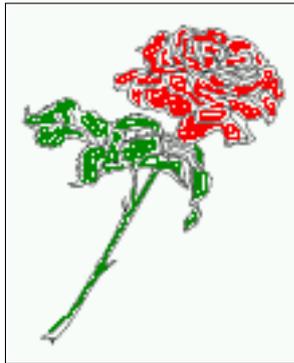


Figure 3: Default caption width setting, which is the natural width with respect to the current linewidth.

{Caption right beside with a `\emph{natural}` width, which is given by the width of the object, the separation between object and caption, and the current linewidth.}{fig:width1}

float

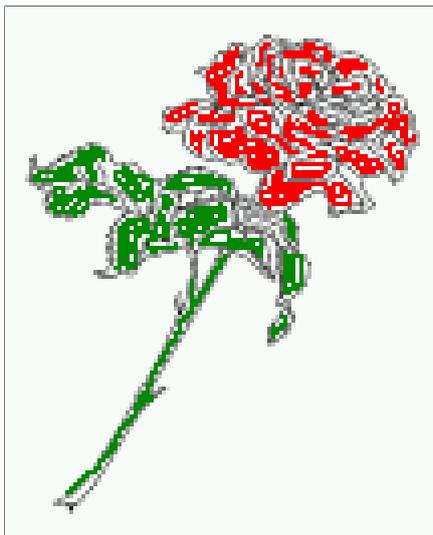


Figure 4: Caption right beside with a *natural* width, which is given by the width of the object, the separation between object and caption, and the current linewidth.

4.2 Relative linewidth

With `capWidth=<number>` the caption width is set to `<number>\columnwidth`. For captions at the bottom or on top of objects the setting is not checked if `<number>` is greater than 1.

```
\hvFloat[floatPos=!htb,capWidth=0.9]{figure}{\includegraphics{images/rose}}%
{Caption below with a width of 0.9 of the current line width (column width), which is
in this special case \the\linewidth. Divide it by 28.82 to get cm.}{fig:width2}
```

float

4 Caption width



Figure 5: Caption below with a width of 0.9 of the current line width (column width), which is in this special case 376.4258pt. Divide it by 28.82 to get cm.

If such a value like 0.9\linewidth is used for a caption beside an object, then the macro does a test if the space beside the object is less equal the defined caption width. If not then the width is set to the possible value between object and margin:

```
\hvFloat[floatPos=!htb,  
capPos=after,  
capWidth=0.9]{figure}{\includegraphics[scale=1.5]{images/rose}}%  
{Caption right beside with a width setting of  $\texttt{0.9\textbackslashlinewidth}$   
which is too big for this example and therefore corrected  
by the macro to the maximal width.}{fig:width3}
```

`float`


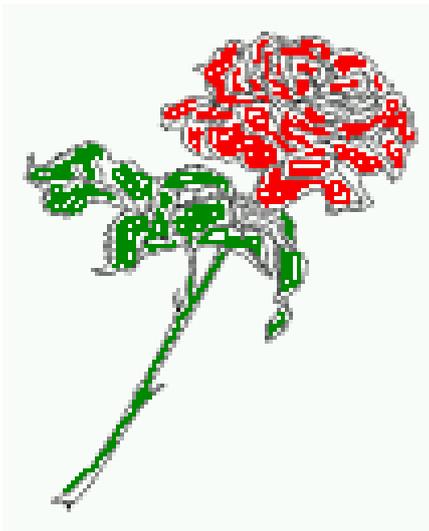


Figure 6: Caption right beside with a width setting of 0.9\linewidth which is too big for this example and therefore corrected by the macro to the maximal width.

4.3 Identical object and caption width

With `capWidth=w` the caption width is like the object width which makes only real sense if you have a lot of identical images with respect to its widths.

```
\hvFloat[floatPos=!htb, capWidth=w]{figure}{\includegraphics[width=0.5\linewidth]{images/CTAN}}%
{Caption below with a width of the given object which may be a problem
if it is a very small object.}{fig:width4}
```

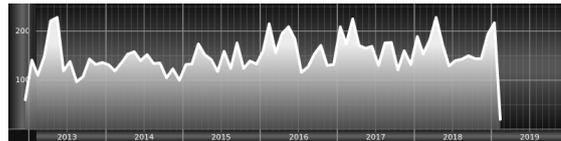

float

Figure 7: Caption below with a width of the given object which may be a problem if it is a very small object.

4.4 caption width to height of the object

With `capWidth=h` the caption width is like the object height which makes only real sense if you want to put a rotated caption beside the object.

```
\hvFloat[floatPos=!htb, capPos=after, capWidth=h, capAngle=90, objectFrame]{figure}{\includegraphics{
images/rose}}%
{Caption beside with a width of the given object height which may be a problem
if it is a very small object.}{fig:width5}
```

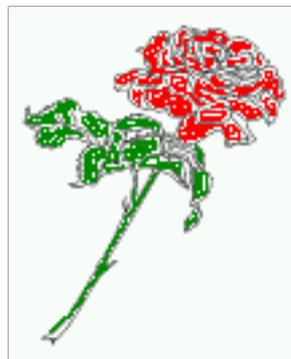


Figure 8: Caption beside with a width of the given object height which may be a problem if it is a very small object.

5 Caption left or right of the object

By default the caption is set on the left side of the object. If the caption and the object are set side by side, then the keyvalue before is identical to the setting left.

5 Caption left or right of the object

5.1 Caption right with specific length

Code for figure 9:

```
\hvFloat%  
  [floatPos=htb,  
   capPos=right,  
   objectFrame,  
   objectPos=c]{figure}{\includegraphics[scale=0.9]{images/rose}}%  
  [Caption beside object and vertically centered]%  
{Caption vertically centered right beside the float with a natural caption width  
  (the default). \blindtext}%  
{fig:1}
```

float
capPos=right

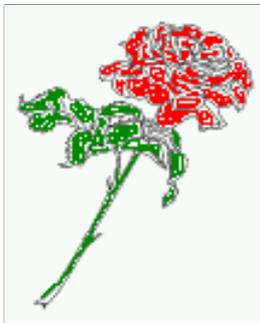


Figure 9: Caption vertically centered right beside the float with a natural caption width (the default). Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

5.2 Caption left and rotated


Code for figure 10:

```
\hvFloat%  
  [floatPos=htb,  
   capPos=left,  
   capWidth=h,% of \columnwidth  
   capAngle=90,  
   objectFrame  
  ]{figure}{\includegraphics{images/rose}}%  
  [Centered Caption beside Object]%  
{Caption vertically centered left beside the float with a caption width  
  of \texttt{capWidth=h}, which is the height of the object.}{fig:2}
```

float
capAngle=90

It is no problem to rotate the object, too. But with a different angle value than for the caption. Do not ask for the sense, it is only a demonstration of what is possible ... The object (image) is rotated by -30 degrees with the macro `\rotatebox`. Without any definition the caption will be placed vertically centered to the object. Important for the height of the object is the surrounding orthogonal rectangle.

Figure 10: Caption vertically centered left beside the float with a caption width of capWidth=h, which is the height of the object.

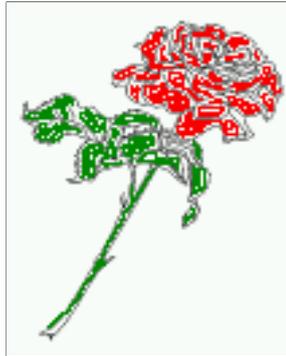

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

Code for figure 11:

```
\hvFloat[%
  capWidth=h,
  capPos=after,
  capAngle=180,
  objectAngle=90,
  capVPos=center,
  objectPos=center]{figure}{\frame{\includegraphics{images/rose}}}%
[Centered Caption beside Object]{%
{Caption vertically centered right beside the float with a caption width of the height
of the image and a rotation of the caption and the object.}}{fig:3}
```

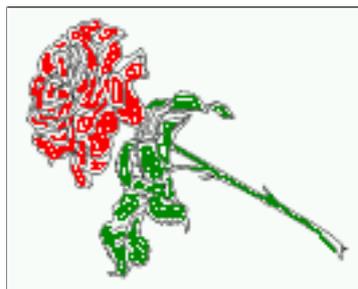


Figure 11: Caption vertically centered right beside the float with a caption width of the height of the image and a rotation of the caption and the object.

`float`

6 Caption inner or outer

Setting the caption position to *inner* or *outer* makes only sense for a document in twoside mode. For a onside document *inner* is the same as *left* and *outer* is the same as *right*. We show only

6 Caption inner or outer

the code for the first image with the setting `capPos=inner` , whereas the second one chooses only `capPos=outer` .

Code for figure 12:

```
\hvFloat[capPos=inner]{figure}{\includegraphics{images/rose}}%  
  [Centered Caption on the inner side]{%  
  Caption set with the parameter setting \texttt{capPos=inner}, which will be  
  a caption on the right side for an even page and on the left side for  
  an odd page.}{fig:20}
```

float
capPos=inner



Figure 12: Caption set with the parameter setting `capPos=inner`, which will be a caption on the right side for an even page and on the left side for an odd page.

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

Now the same Image with `capPos=outer` . The current `pagenumber` is 16, an even page. We now set a `pagebreak` at the end of the second image to see if it works with *inner/outer*.

```
\hvFloat[capPos=outer]{figure}{\includegraphics{images/rose}}%  
  [Centered Caption on the inner side]{%  
  Caption set with the parameter setting \texttt{capPos=outer}, which will be  
  a caption on the right side for an even page and on the left side for  
  an odd page.}{fig:20b}
```

floatfloat
capPos=outer

We have an even page, the reason why figure 13 has the caption for *inner* on the left side and figure 14 for *outer* on the right side.

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

Code for figure 15:



Figure 13: Caption set with the parameter setting `capPos=outer`, which will be a caption on the right side for an even page and on the left side for an odd page.



Figure 14: Caption at the bottom right beside the float with a caption width of 0.5columnwidth and `capPos=outer`.

```
\hvFloat[%
  capWidth=0.5,% of \columnwidth
  capPos=inner,% ==>> INNER
  capAngle=0,
  capVPos=bottom,
  objectPos=center]{figure}{\includegraphics{images/rose}}%
  [Centered Caption beside Object]{%
  Caption vertically centered right beside the float with a caption
  width of \texttt{0.5\textbackslash columnwidth} and \texttt{capPos=outer} }{fig:22}
```

`float`

Figure 15: Caption vertically centered right beside the float with a caption width of 0.5columnwidth and `capPos=outer`



We have an odd page, the reason why figure 12 has the caption for *inner* on the right side and figure 14 for *outer* on the left side.

7 Vertical Position of the Caption

The caption can be placed beside the object in the positions

(c)enter|(b)ottom|(t)op

The code for figure 16:

```
\hvFloat[%  
  floatPos=htb,%  
  capWidth=0.25,%  
  capPos=right,%  
  capVPos=bottom,%  
{figure}{\frame{\includegraphics{images/rose}}}{Caption at bottom right beside the float}{fig:4}
```

`float`

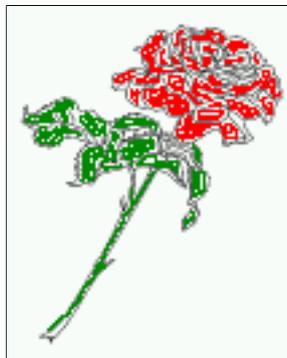



Figure 16: Caption at bottom right beside the float

The code for figure 17:

```
\hvFloat[%  
  floatPos=htb,  
  capWidth=0.25,  
  capPos=right,  
  capVPos=top,  
{figure}{\frame{\includegraphics{images/rose}}}{Caption at top left beside the float}{fig:5}
```

`float`

Figure 17: Caption at top left beside the float

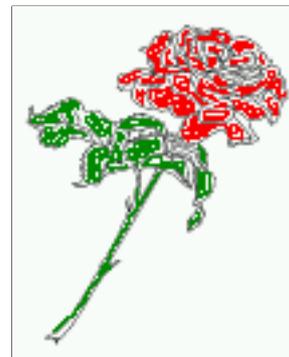

The code for figure 18:

```

\hvFloat[%
  capWidth=0.25,
  capPos=right,
  capVPos=center,% the default
]{figure}{\frame{\includegraphics{images/rose}}}{Caption centered right beside the float}{fig:6}

```

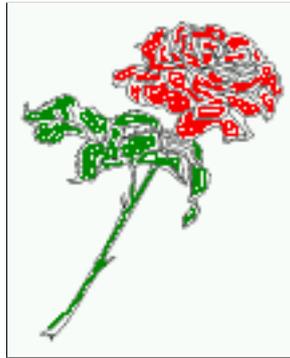


Figure 18: Caption centered right beside the float

float

8 Caption format

The `\caption` and `\subcaption` macros are fully under the control of the package `caption`. The formatting can be set with the macros `\captionsetup`, `\subcaptionsetup`, or via the optional argument setting of `\hvFloat` with the keywords `capFormat` and `subcapFormat`. The argument itself will then be used internally by `\captionsetup` and/or `\subcaptionsetup` in a minipage, the reason why it will be local to the current image..

```

\hvFloat[%
  capPos=right,
  capFormat={labelsep=newline,justification=RaggedRight,font={small,it},labelfont=bf}
]{figure}{\frame{\includegraphics{images/rose}}}{\blindtext}{fig:66}

```

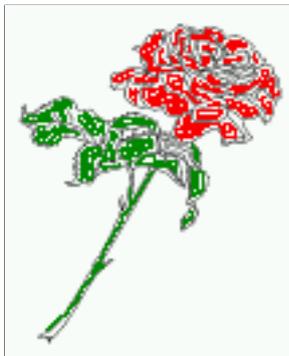


Figure 19

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

float

9 Horizontal Position of the Float

The caption is always near the object, only divided by the length `\floatCapSep` which can be set by the keyword of the same name `floatCapSep`. It accepts only a value with any allowed unit. The keyword `objectPos` refers always to the complete floating object: caption *and* object. The meaning of `objectPos=left` is: Put the object as far as possible to the left margin. If `capPos=left` is also used, then the caption is at the left margin followed by the object (see Figure 21 on the next page).

The code for figure 20:

```
\hvFloat[%
  capWidth=0.25,
  capPos=right,
  capVPos=top,
  objectPos=left,
  objectFrame,
]{figure}{\includegraphics{images/rose}}{%
  Caption at top right beside the float and object position left}{fig:7}
```

float



Figure 20: Caption at top right beside the float and object position left


Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

The same with `capPos=left` :

float
capPos=left

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

Figure 21: Caption at top right beside the float and object position left

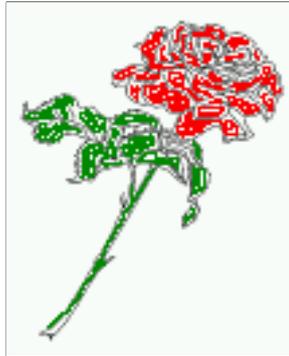

The code for figure 22:

```
\hvFloat[%
  capWidth=0.25,
  capPos=before,
  capVPos=top,
  objectPos=right,
  objectFrame,
]{figure}{\includegraphics{images/rose}}{%
  Caption at top leftt beside the float and object position right}{fig:8}
```

Figure 22: Caption at top left beside the float and object position right



`float`

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

10 Wide floats

With the optional argument `wide` the width of the defined `\marginparwidth` is added to the allowed horizontal width of the float.

10 Wide floats

The code for figure 23:

```
\hvFloat[wide,  
  capPos=right,  
  capVPos=top,  
  objectPos=left,  
{figure}{\includegraphics[width=0.75\linewidth]{images/CTAN}}{%  
  Caption at top right beside the float and object position left and  
the option \texttt{wide}.}{fig:70}
```


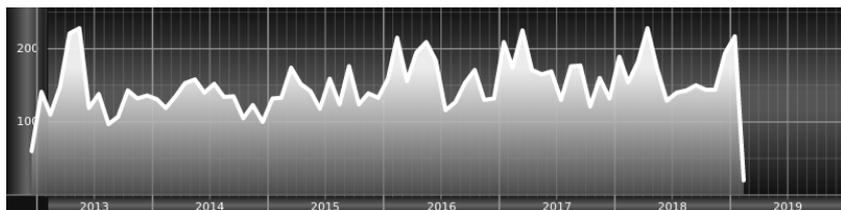


Figure 23: Caption at top right beside the float and object position left and the option wide.

The code for figure 24:

```
\hvFloat[wide,  
  capPos=left,  
  capVPos=top,  
  objectPos=right,  
{figure}{\includegraphics[width=0.75\linewidth]{images/CTAN}}{%  
Caption at top left beside the object and object position left and  
the option \texttt{wide}.}{fig:80}
```

Figure 24: Caption at top left beside the object and object position left and the option wide.

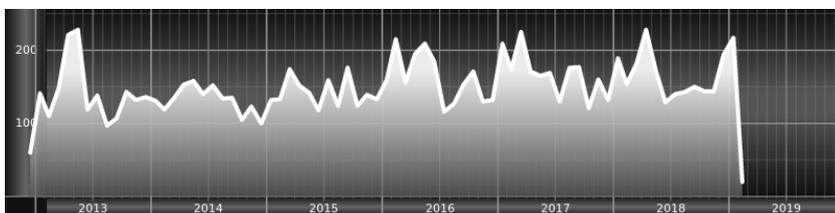


For a twosided document it will place the object always in the margin.

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

```
\hvFloat[wide,  
  capPos=inner,  
  capVPos=top,  
{figure}{\includegraphics[width=0.75\linewidth]{images/CTAN}}{%  
Caption at top and inner beside the float and object position right and
```

the option `\texttt{wide}.`{fig:81}

Figure 25: Caption at top and inner beside the float and object position right and the option wide.

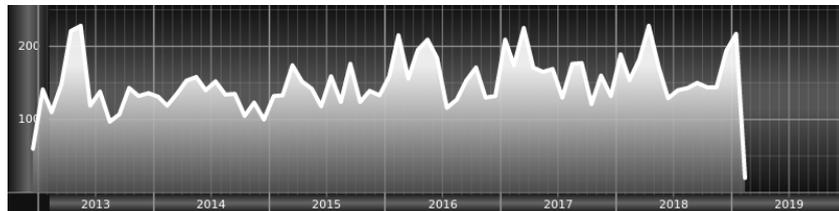


Now we set the same image with the same setting on the next page. The caption will change its side due to the setting `capPos=outer`.

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

```
\hvFloat[wide,  
  capPos=inner,  
  capVPos=top,  
{figure}\includegraphics[width=0.75\linewidth]{images/CTAN}}{%  
Caption at top inner beside the float and object position right and  
the option \texttt{wide}.{fig:811}
```

Figure 26: Caption at top inner beside the float and object position right and the option wide.

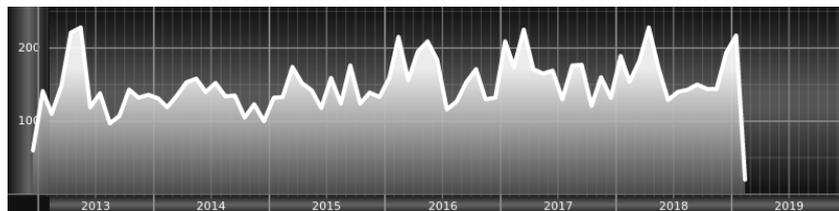


The caption can be typeset completely into the margin with:

```
\captionsetup{justification=RaggedRight}  
\hvFloat[wide,  
  capPos=outer,  
  capVPos=top,  
  floatCapSep=\marginparsep,  
{figure}\includegraphics[width=\linewidth]{images/CTAN}}{%  
Caption at top inner beside the float and object position right and  
the option \texttt{wide}.{fig:812}
```

12 Full Page Width in Landscape Mode

Figure 27:
Caption at top
inner beside the
float and object
position right
and the option
wide.

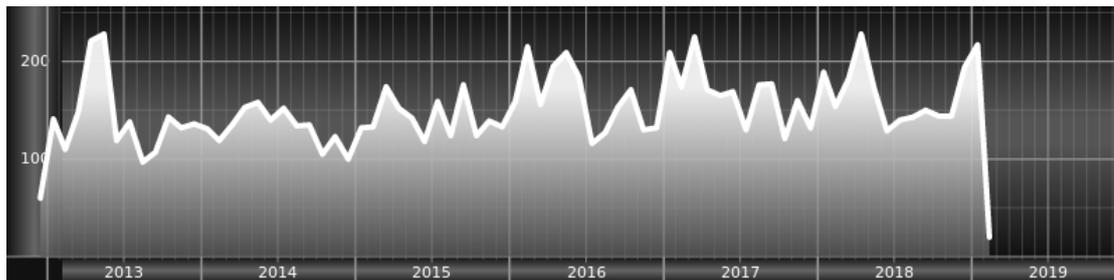

11 The star version \hvFloat*

In the twocolumn mode the floating environment can be set over both columns with the star version `\hvFloat*`. The floating environment will not be on the bottom of the page. The code for the following example (Figure 28) is:

```
\hvFloat*[capPos=right]{figure}%
{\includegraphics{images/frose}}%
[A float with the default caption setting]%
{A default caption of a '' object with the default setting, which
is a ''left'' caption which means that it always appears before the object.
This can be an even or odd page. And some more text which has no
real meaning because it fills only the space for a long caption.}%
{fig:0}
```

The example shows on page 3 the star version and on page 4 the same without using the star.

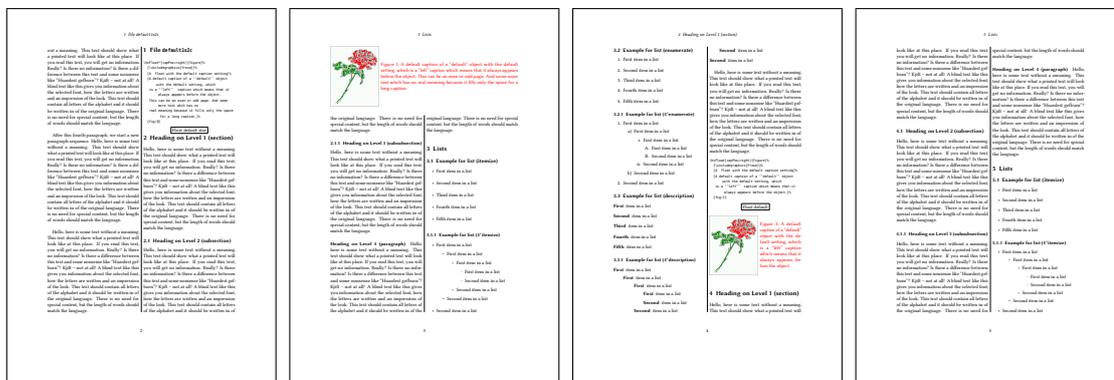


Figure 28: Output of default1s2c (pages 2 –5)

12 Full Page Width in Landscape Mode

If you do not want to load the package `lscope` (or `pdfLscope`) you can use the `floatPos=p` option to put the image on an own page and rotated by 90 degrees (figure 29).

Code for figure 29:

```

\hvFloat[%
  floatPos=p,
  capPos=bottom,
  rotAngle=90,
  objectPos=center,
]{figure}{\includegraphics[width=0.9\textheight]{images/CTAN}}%
  [Object and Caption in landscape mode]{%
  Caption and object in landscape mode. \blindtext}{fig:9}

```

The float can also be put to the left or to the right (above/below in landscape) with the `objectPos=l` parameter

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

float landscape

The code for figure 30:

```

\hvFloat[%
  floatPos=p,
  capWidth=h,
  capPos=right,
  objectAngle=90,
  capAngle=-90,
  objectPos=left,
]{figure}{\includegraphics[width=\textheight]{images/CTAN}}%
  [Rotated Caption in Landscape]{%
  Caption right beside the float and object position left. The caption rotated by $-90$
  degrees.\blindtext}{fig:10}

```

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

float

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.


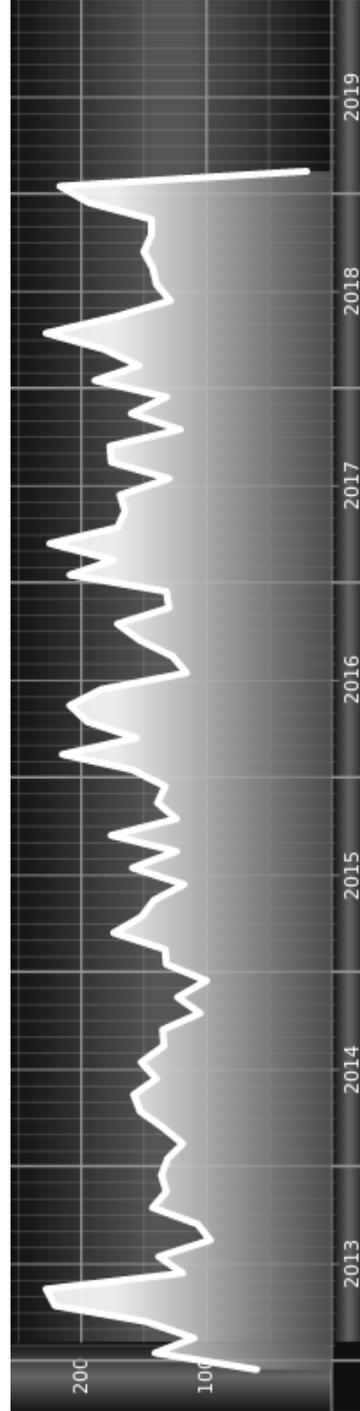


Figure 29: Caption and object in landscape mode. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

Figure 30: Caption right beside the float and object position left. The caption rotated by -90 degrees. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like "Huardest gefburn"? Kjiff – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

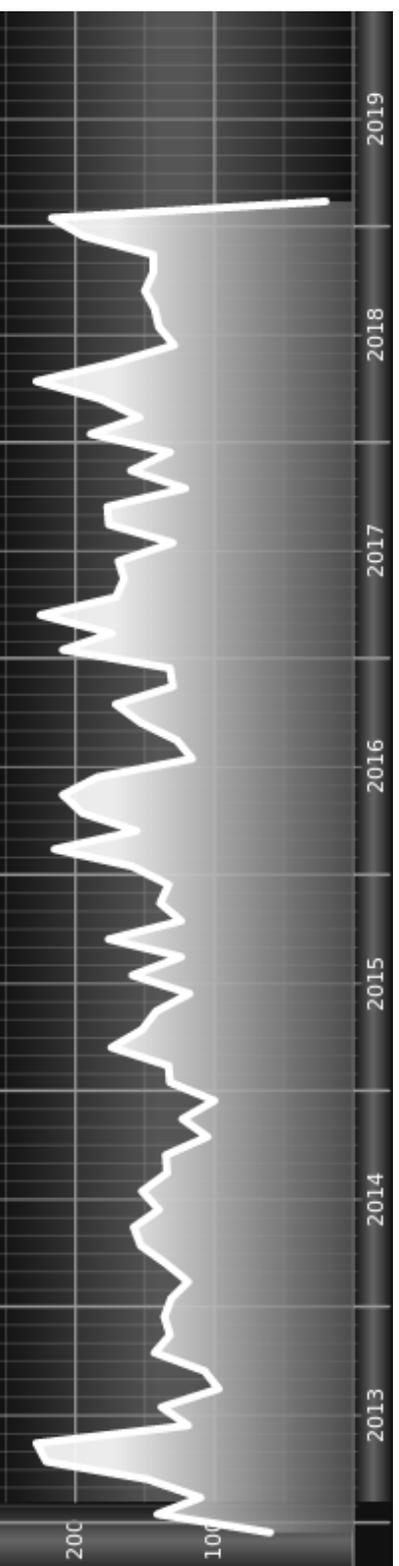

13 The nonFloat Option

Sometimes it is better to put a “float” in a specific position of the page. This is possible with the nonfloat package and the keyword nonFloat.

Some nonsense text before the following `\emph{non floating}` object.

```
\hvFloat[%
  nonFloat,
  capWidth=0.25,
  capPos=right,
  capVPos=bottom,
  objectPos=center,
  objectFrame,
]{figure}{\includegraphics[scale=1.5]{images/rose}}%
  [Nonfloat Captions]{%
  Caption of a ‘‘nonfloat’’ Object, using the \texttt{nonfloat} Package}{fig:11}
```

Some nonsense text after the preceding `\emph{non floating}` object.

`float`

Some nonsense text before the following *non floating* object.

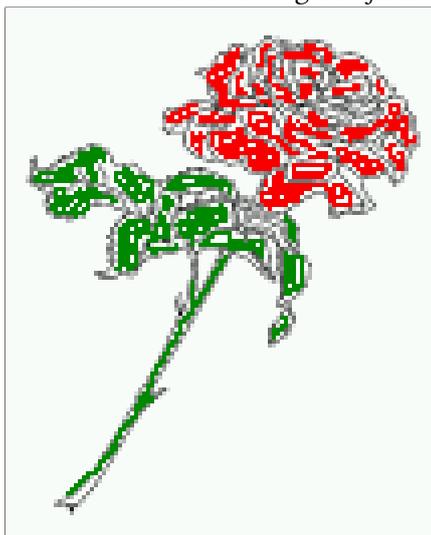


Figure 31: Caption of a “nonfloat” Object, using the nonfloat Package

Some nonsense text after the preceding *non floating* object.

The image 31 is exactly placed where the command `\hvFloat` appears. There are only commands for figure and table environments:

```
\newcommand{\figcaption}{\def\@capttype{figure}\caption}
\newcommand{\tabcaption}{\def\@capttype{table}\caption}
```

But it is no problem, to define more xxxcaption commands to support other with the float package defined new floats.

14 Tabulars as Objects

The object has to be passed as an parameter to the `\hvFloat` macro. This is no problem with images but maybe with tables, so it is easier to use the box `\hv0Box` to save the table in this box and pass it then to `\hvFloat` with the `use0Box` option. For example see table 4 and 5:

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

```
\savebox{\hv0Box}{%
\begin{tabular}>{\small\ttfamily}l|l|l\hline
\rmfamily Name & Type & Description\\\hline
\CMD{hvFloat} & command & places object and caption in different ways\\
hvFloatEnv & environment & places object and caption exactly Here\\
\CMD{figcaption} & command & writes a figure caption in a non floating environment\\
\CMD{tabcaption} & command & writes a table caption in a non floating environment\\
\CMD{setDefault} & command & sets all options to the defaults\\\hline
\end{tabular}%
}
```

The code for table 4 and 5 is:

```
\hvFloat[%
floatPos=!hb,
capPos=top,
use0Box=true]{table}{\texttt{use0Box} Parameter}{table:1}

\blindtext

\hvFloat[%
floatPos=hb,
use0Box=true,
objectAngle=90,
capPos=right,
capVPos=top,
capWidth=0.3]{table}{\texttt{use0Box} Parameter}{table:2}
```

In this case leave the third parameter empty.

float

15 Text and objects

With the `onlyText` keyword it is no problem to put some text beside an image without getting the caption title Figure/Table. The object still can be a floating one or a nonfloating if the `nonfloat` keyword is used.

The code for figure 15:

Table 4: Demonstration of the use0Box Parameter

Name	Type	Description
<code>\hvFloat</code>	command	places object and caption in different ways
<code>hvFloatEnv</code>	environment	places object and caption exactly Here
<code>\figcaption</code>	command	writes a figure caption in a non floating environment
<code>\tabcaption</code>	command	writes a table caption in a non floating environment
<code>\setDefaultts</code>	command	sets all options to the defaults

Name	Type	Description
<code>\hvFloat</code>	command	places object and caption in different ways
<code>hvFloatEnv</code>	environment	places object and caption exactly Here
<code>\figcaption</code>	command	writes a figure caption in a non floating environment
<code>\tabcaption</code>	command	writes a table caption in a non floating environment
<code>\setDefaultts</code>	command	sets all options to the defaults

Table 5: Demonstration of the use0Box Parameter

```
\hvFloat[%
  onlyText=true,
  capAngle=90,
  capPos=right,
  capVPos=top,
```

```
objectFrame,
capWidth=h]{\includegraphics{images/rose}}%
[["\texttt{onlyText}" Caption]{%
  Demonstration of the \texttt{onlyText} Parameter, which makes it
  possible to put some text beside a floating object without getting
  a starting \texttt{Figure:} or \texttt{Table:}}{fig:text}
```



Demonstration of the `onlyText` Parameter, which makes it possible to put some text beside a floating object without getting a starting `Figure:` or `Table:`

float

16 Environment `hvFloatEnv`

With the environment `hvFloatEnv` one can place an object exactly on that position where the environment is defined. For captions the use of `\captionof` is recommended:

```
\begin{hvFloatEnv}
\captionof{table}{A caption for a nice table}
\begin{tabular}{@{} l c r @{}}\hline
left & center & right \\
L & C & R \\
\end{tabular}
\end{hvFloatEnv}
```

Table 6: A caption for a nice table

left	center	right
L	C	R

The environment has an optional argument for setting the line width which is preset to `\textwidth`. The object is always centered.

```
\begin{hvFloatEnv}[0.5\textwidth]
\captionof{table}{A caption for a nice table}
\begin{tabular}{@{} l c r @{}}\hline
left & center & right \\
L & C & R \\
\end{tabular}
\end{hvFloatEnv}
```

Table 7: A caption for a nice table

left	center	right
L	C	R

17 Full page objects in onecolumn mode

For an image or table which needs the whole space of a page the caption can be printed at the bottom of the preceding or following page. It is possible in oneside and twoside mode, but makes only real sense in the twoside mode. hvfloat defines three additional optional arguments for placing images in a complete column, page or paper:

```
\define@key{Gin}{fullpage}[true]{%           \define@key{Gin}{FullPage}[true]{%
  \def\Gin@ewidth{\columnwidth}%           \def\Gin@ewidth{\textwidth}%
  \def\Gin@eheight{\textheight}%         \def\Gin@eheight{\textheight}%
  \Gin@boolkey{false}{iso}%              \Gin@boolkey{false}{iso}%
}                                           }
\define@key{Gin}{FULLPAGE}[true]{%
  \def\Gin@ewidth{\paperwidth}%
  \def\Gin@eheight{\paperheight}%
  \Gin@boolkey{false}{iso}%
}
```

Figure 32 on the next page shows the meaning of the optional arguments fullpage, FullPage, and FULLPAGE for `\includegraphics[...]{tiger}`.

17.1 Using the textarea

The setting capPos=evenPage (even) or capPos=oddPage (odd) page for a document in twocolumn mode makes no real sense. For a twosided document a setting like capPos=inner for inner or capPos=outer for outer margin makes more sense. For an image or table which needs the whole space of a page the caption can be printed at the bottom of the preceding or following page. It is possible in oneside and twoside mode, but makes only real sense in the twoside mode. Without any additional argument the caption is set first and the object on the following page:

17.1.1 Using the default or capPos=before

Without any additional argument the caption is set first (left) at the bottom of the current page and the object on the following page. This is the same setting like capPos=left for a onecolumn document. For the twocolumn option it makes more sense to use the setting capPos=before if the caption and object can appear on different pages.

```
\hvFloat[fullpage]%
{figure}%
{\includegraphics[fullpage]{images/frose}}%
[A fullpage float with the default caption setting]%
[A default caption of a "fullpage" object with the default setting, which
```

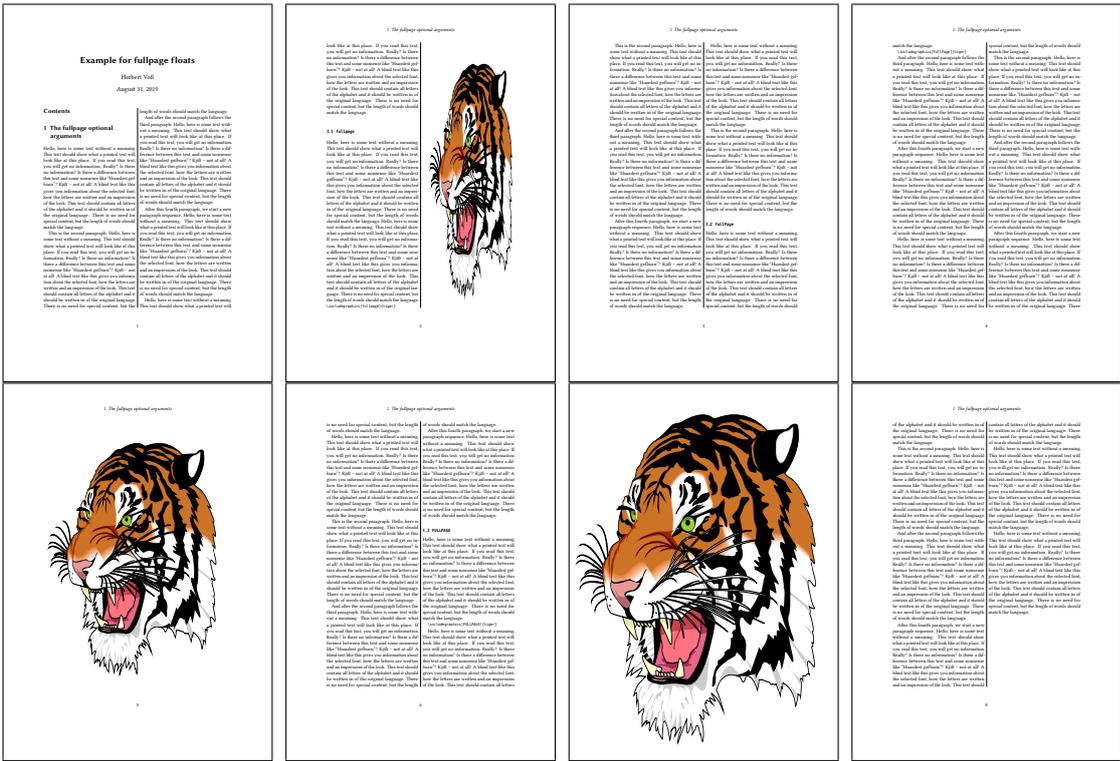


Figure 32: Output of fullpage1s2c (pages 1-8)

is a ‘‘left’’ caption which means that it always appears ‘‘before’’ the object. This can be an even or odd page. And some more text which has no real meaning because it fills only the space for a long caption.}%
{fig:fullpage0}

With this setting the caption is always placed *before* the following object. This maybe sufficient for a oneside document but not the best solution if this document is printed on a duplex machine. In such a case it may make sense to have the captions always on an even (left) page, even though the document is typeset in a oneside mode. Figure 33 on the following page shows the output for a oneside document with a setting capPos=before .

Depending to the used documentclass it can be a problem, if the caption should be placed on the first page. In such a case use one of the other setting. Table 8 on the next page shows the valid optional arguments for a full page floating object.

17 Full page objects in onecolumn mode

Table 8: Valid optional arguments for a full page object.

Name	Type	Description
fullpage	true false	Put the caption on the bottom of the preceding or following page and the object alone a page.
FULLPAGE	true false	The same for full papersize objects over one or two columns. The pagestyle is set to empty
multiFloat	true false	For multiple objects with captions for every object. See section 17.3 on page 39.
subFloat	true false	For multiple objects with one main and more subcaptions. See section 18 on page 41.
separatorLine	true	Put a line with a predefined width of 0.4pt between the text and the caption. Only valid for the keyword fullpage.
capPos	value	caption before, after an object or on an evenPage or oddPage.

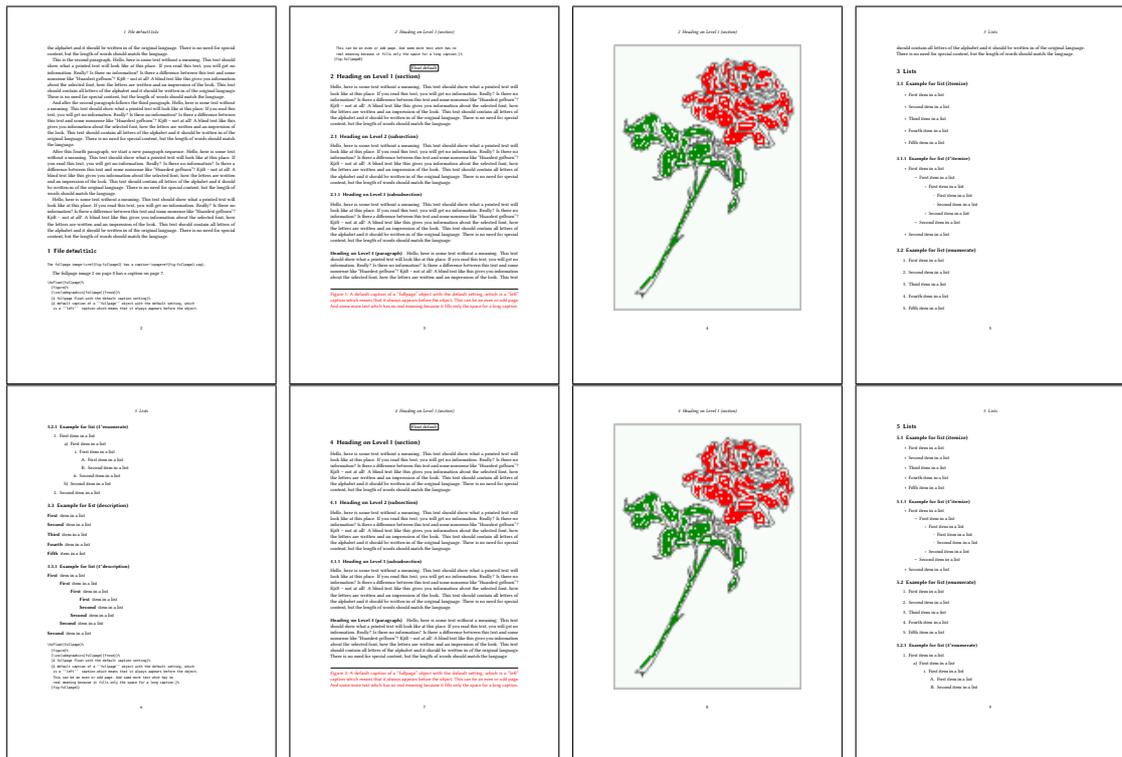


Figure 33: Output of default1s1c (pages 2–9)

17.1.2 Using capPos=after

The caption will be printed always on the right side which is the same as *after* the full page object. The object appears immediately on the next page and the caption of the next following page at the bottom. There is no check for an even or odd page. This behaviour makes only sense for a oneside document.

```
\hvFloat[fullpage, capPos=after]%
{figure}%
{\includegraphics[fullpage]{images/frose}}%
[A float which needs the complete page width and height.]%
{A Caption of a "fullpage" object, which follows on the next page.
This can be an even or odd page. And some more text which has no
real meaning because it fills only the space for a long caption.}
{fig:fullpage}
```

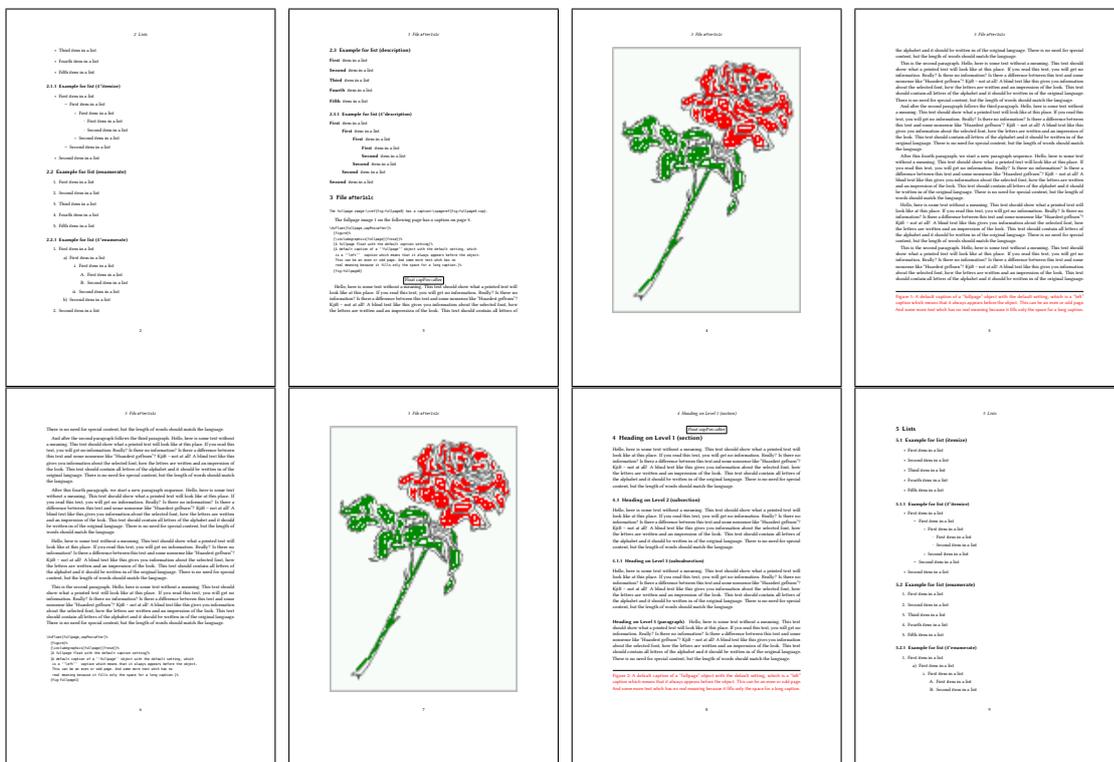


Figure 34: Output of after1s1c (pages 2–9)

17 Full page objects in onecolumn mode

17.1.3 Using capPos=evenPage — caption on an even page

With capPos=evenPage the caption will be printed on an even (left) page, the object will always be on an odd (right) page. This option makes only real sense for The twoside mode!

```
\hvFloat[fullpage, capPos=evenPage]%  
{figure}%  
{\includegraphics[fullpage]{images/frose}}%  
[A float with a caption on an even page (left)]%  
{A caption on an even (left) page of a "fullpage" object.. \blindtext}  
{fig:fullpage3}
```

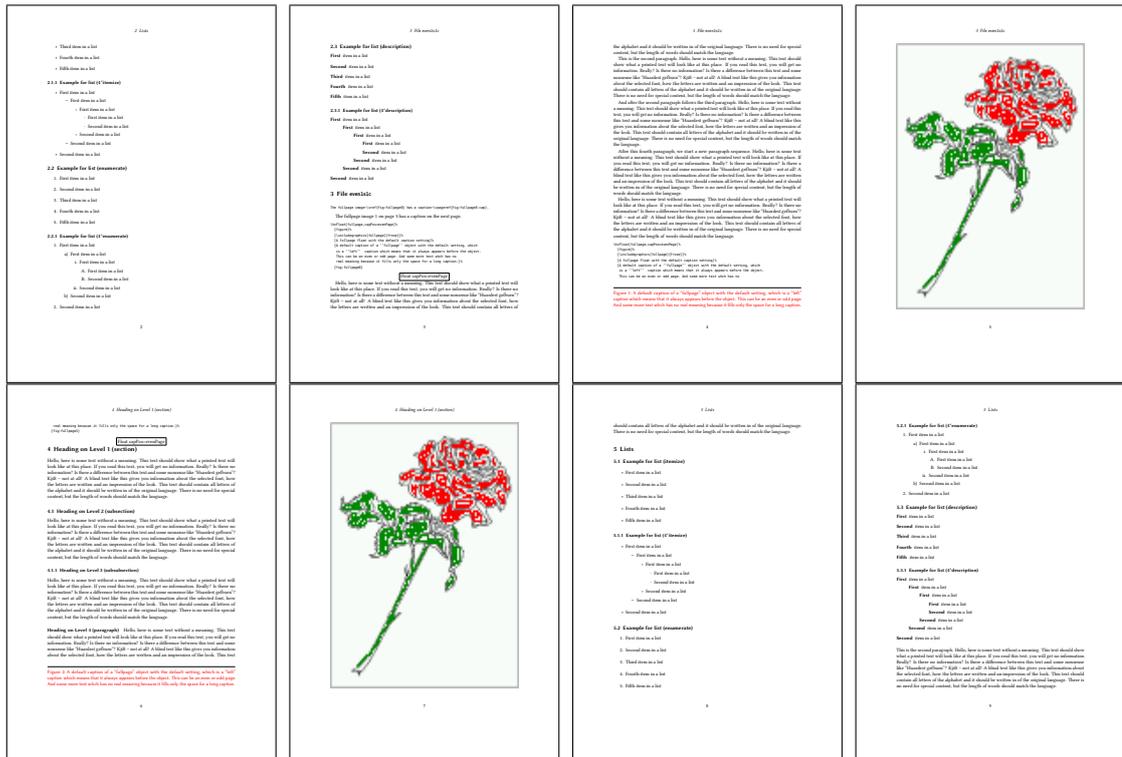


Figure 35: Output of even1s1c (pages 2–9)

17.1.4 Using capPos=oddPage — caption on an odd page

With capPos=oddPage the caption will be printed on an odd (right) page, the object will always be on an even (left) page, which is before the caption.

```
\hFloat[fullpage, capPos=oddPage]%
{figure}%
{\includegraphics[fullpage]{images/frose}}%
[A float which needs the complete page width and height.]%
{A Caption on an odd page of a "fullpage" object, which follows on the next page.
This can be an even or odd page. And some more text which has no
real meaning because it fills only the space for a long caption.}
{fig:fullpage2}
```

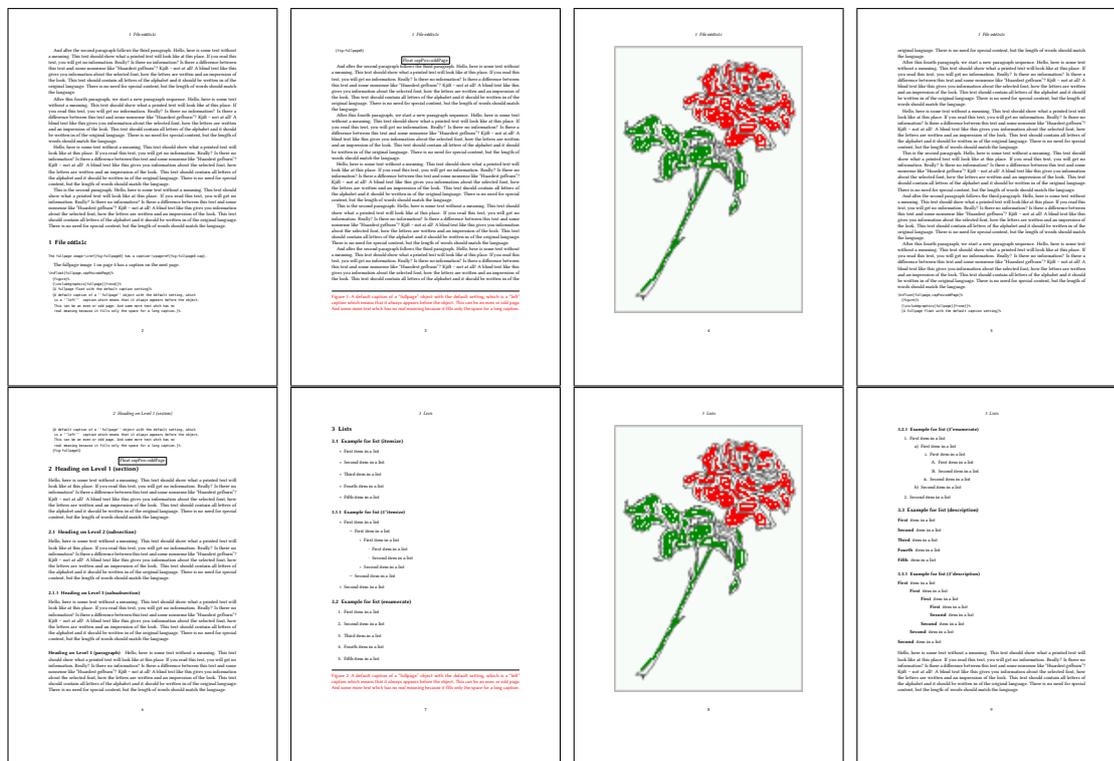


Figure 36: Output of odd1s1c (pages 2-9)

17.1.5 Using capPos=inner or capPos=outer — caption on the inner or outer side

These settings make no sense in onecolumn mode.

17 Full page objects in onecolumn mode

17.2 Using the paper size

It belongs to the user to create an object which fills the complete page. However, with the keyword FULLPAGE which is valid for \hvfloat and for the macro \includegraphics an image will be scaled to the paper dimensions \paperwidth and \paperheight. It can be used in one- and twocolumn mode!

```
\hvFloat[FULLPAGE]%  
{figure}%  
{\includegraphics[FULLPAGE]{froese.png}}%  
[A fullpage float with the default caption setting]%  
{A default caption of a "fullpage" object with the default setting, which  
is a "left" caption which means that it always appears before the object.  
This can be an even or odd page. And some more text which has no  
real meaning because it fills only the space for a long caption.}%  
{fig:fullpage0}
```

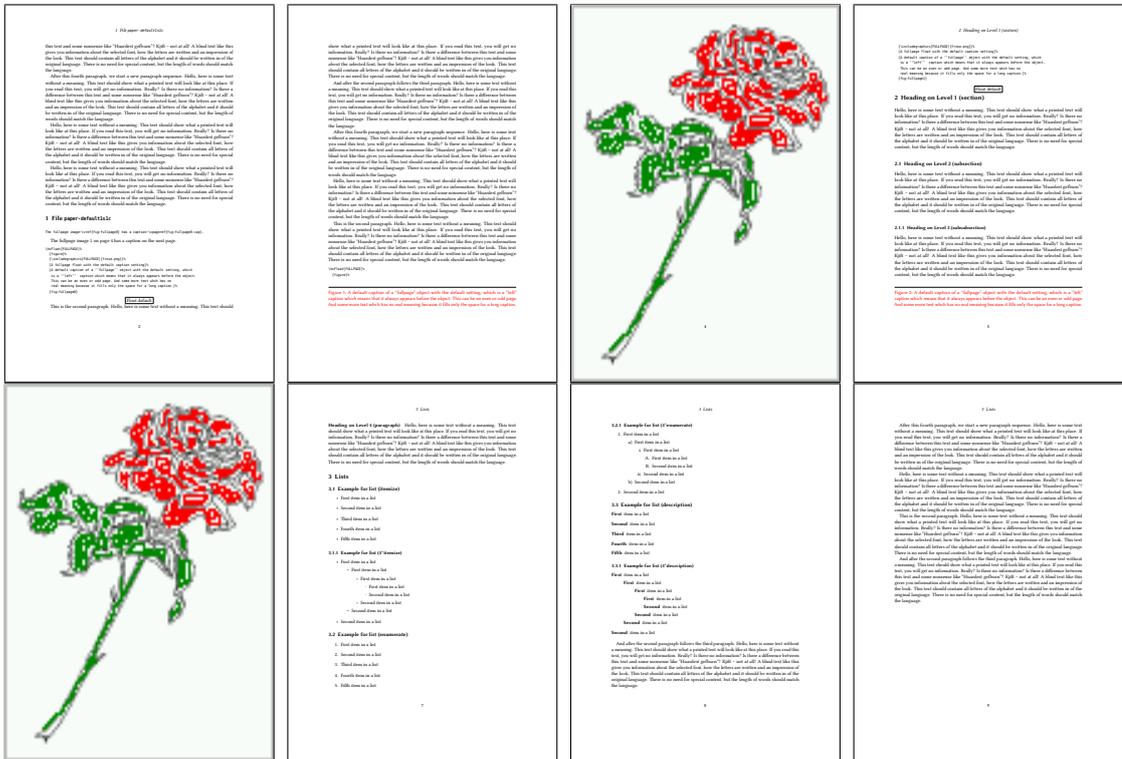


Figure 37: Output of paper-default1s1c (pages 2–9)

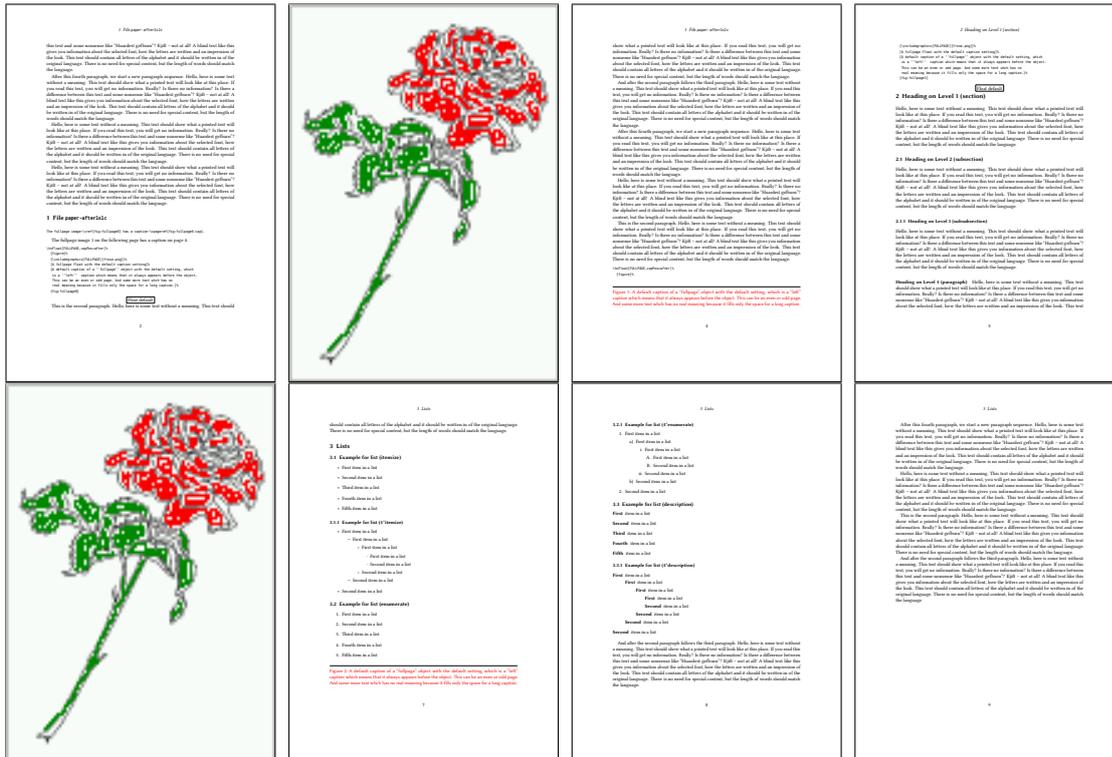


Figure 38: Output of paper-after1s1c (pages 2–9)

17.3 Multifloats

Multifloats is the name for more than one image and/or tabular in *one* floating environment. Every image and/or tabular has its own caption, which is different to a subcaption. The syntax for multiple floats is

```
\hvfFloat [Options] +{float type}{floating object} [short caption] {long caption}{label}
+{float type}{floating object} [short caption] {long caption}{label}
+...
+{float type}{floating object} [short caption] {long caption}{label}
```

The + symbol defines an additional Object which will be part of the same floating environment. It's up too the user to be sure that one page or one column can hold all defined objects. Every object gets its own caption which is the reason why figures and tabulars and ... can be mixed:

```
\captionsetup{singlelinecheck=false}
\hvfFloat[fullpage,capPos=before,multiFloat]%
+{figure}\includegraphics[width=\linewidth]{images/CTAN}% no 1
[Short caption A]%
{A Caption A of a "fullpage" object, which follows on the left or
right column. This can be an even or odd page. And some more text which has no
```

17 Full page objects in onecolumn mode

```

real meaning because it fills only the space for a long caption.}%


```

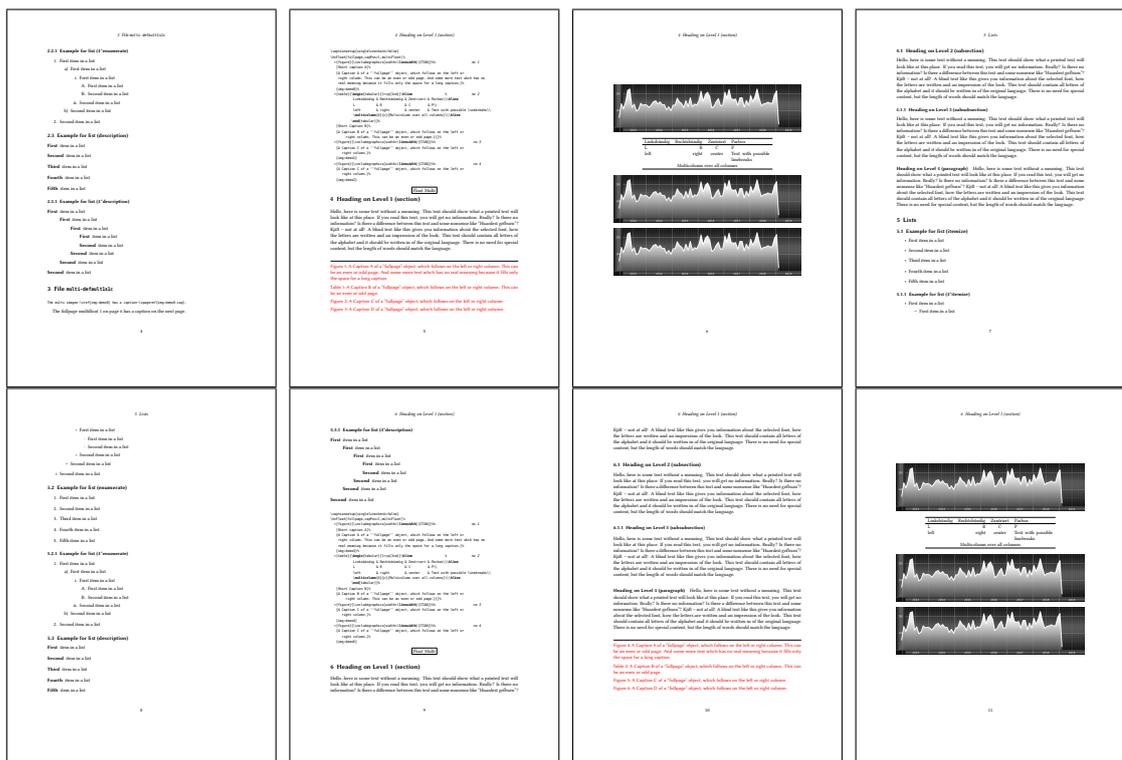


Figure 39: Output of multi-default1s1c (pages 4–11)

The page with the objects has no additional informations it holds only the figures and/or

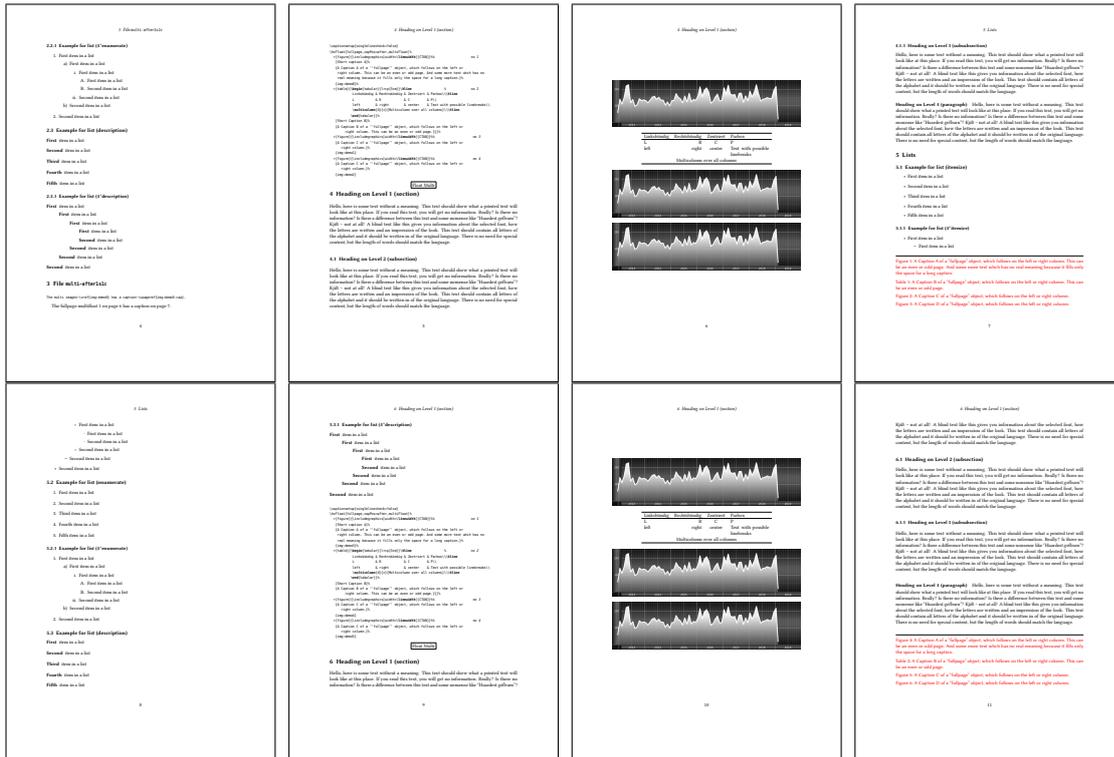


Figure 40: Output of multi-afterls1c (pages 4–11)

tabulars. If you want it like subfigures or subtabulars then go to section 18. The setting `\captionsetup{singlelinecheck=false}` is needed if you want the captions always left aligned.

18 Subfloat page

A subfloat page can have only one type of floats which will have one main caption and individual subcaptions. The syntax is similar to the one for a multifloat page:

```
\hvFloat [Options] +{float type}{<empty>} [short caption] {long caption}{label}
+{<empty>}{floating object} [short caption] {long caption}{label}
+...
+{<empty>}{floating object} [short caption] {long caption}{label}
```

Some arguments are ignored for a subfloat, one can leave them empty. The first line defines only the type and the main caption, the object entry is ignored! All additional lines will have the same float type, the reason why the float type entry is ignored.

```
\hvFloat[fullpage,capPos=before,objectFrame,subFloat]%
+{figure}{}[Short main caption of the objects]% main short lsi entry
{The main caption of a "fullpage" object, which follows on the left or
```

18 Subfloat page

```
right column. This can be an even or odd page. And some more text which has no
real meaning because it fills only the space for a long caption.}% main caption
{sub:demo0}%
+{}{\includegraphics[width=\linewidth]{images/CTAN}}%
[Short caption B]%
{A Caption B of a "fullpage" sub object.}% subcaption
}%
+{}{\includegraphics[width=\linewidth]{images/CTAN}}%
{A Caption C of a "fullpage" object, which follows on the left or right column.}%
{sub:demo1}
+{}{\includegraphics[width=\linewidth]{images/CTAN}}%
{A Caption D of a "fullpage" object}%
{sub:demo2}
+{}{\includegraphics[width=\linewidth]{images/CTAN}}%
{A Caption E of a "fullpage" object}%
{sub:demo3}
```

The keyword `subFloat` defines the images or tabulars as subfloats. The package `subcaption` is loaded by default and should be activated with `\captionsetup[sub][singlelinecheck]`.

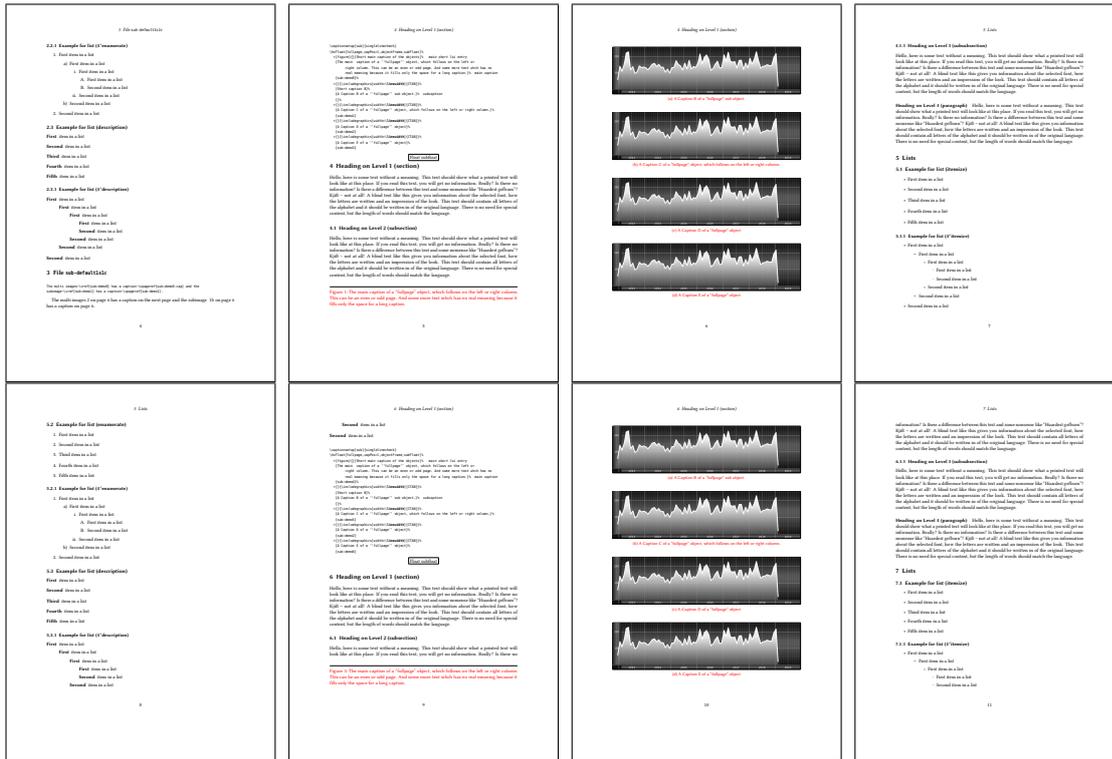


Figure 41: Output of sub-default1s1c (pages 4–11)

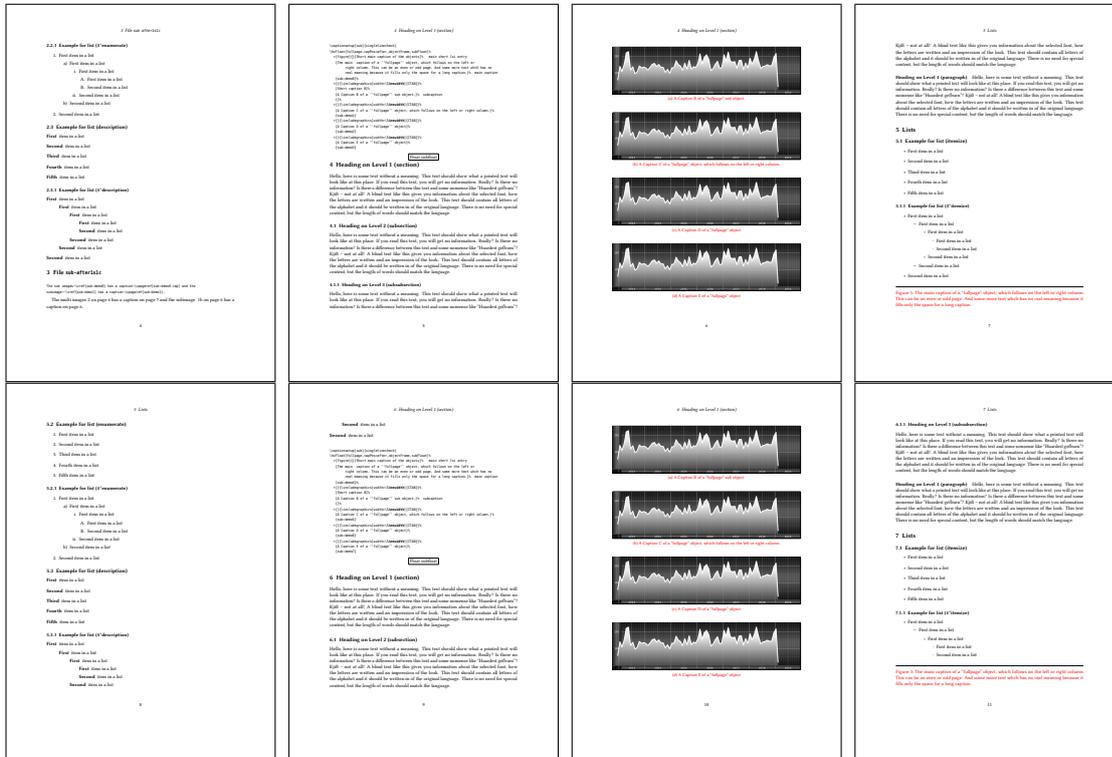


Figure 42: Output of sub-after1s1c (pages 4–11)

19 Full page objects in twocolumn mode

The filenames always have a “2c” for two columns in its names, e.g. left2s2c indicates capPos=before and the documentclass setting twoside and twocolumn. Depending to the used documentclass it can be a problem, if the caption should be placed on the first page of the whole document. In such a case use one of the other setting. Table 8 on page 34 shows the valid optional arguments for a full page floating object.

19.1 Default setting

For the twocolumn mode the caption can be in the left (first) or right (second) column. With the default setting (without using the keyword capPos) it is equivalent to the setting capPos=before, the caption is always placed before (left of) the object. This can be the first or the second column and both can be on different pages. With capPos=before (uppercase L) it is possible to get the caption and the object in the twocolumn mode always on one page. This is then the left (first) column for the caption (see figure 43).

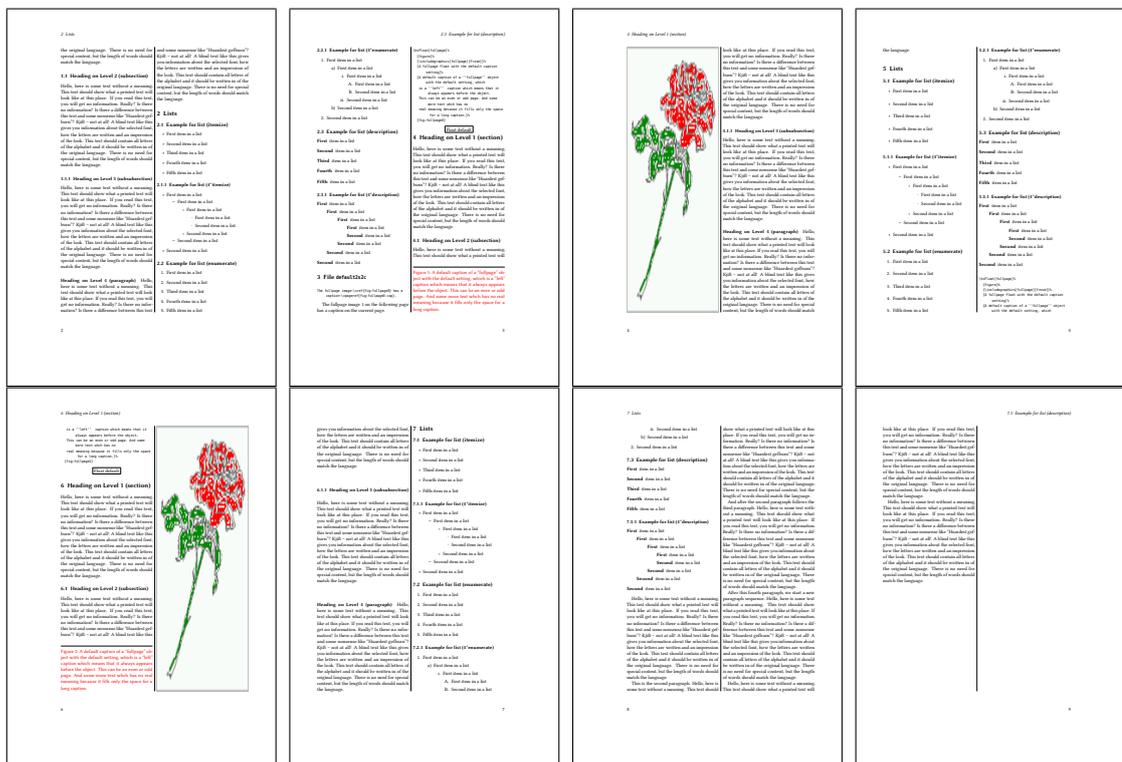


Figure 43: Output of default2s2c (pages 2-9)

```
\hvFloat[fullpage]{figure}%
{\includegraphics[width=\columnwidth,height=0.9\textheight]{images/frose}}%
[A float which needs the complete column width and height.]%
```

{A Caption of a "fullpage" object, which follows on the next column. This is always the right column on an even or odd page. And some more text which has no real meaning because it fills only the space for a long caption.}%
 {fig:fullpage0-2}

The example 43 on the preceding page shows that the caption and the object can be on different pages. If you do not like this behaviour, then use the setting capPos=left, which puts the caption before the object, but always on the same page (see Figure 44).

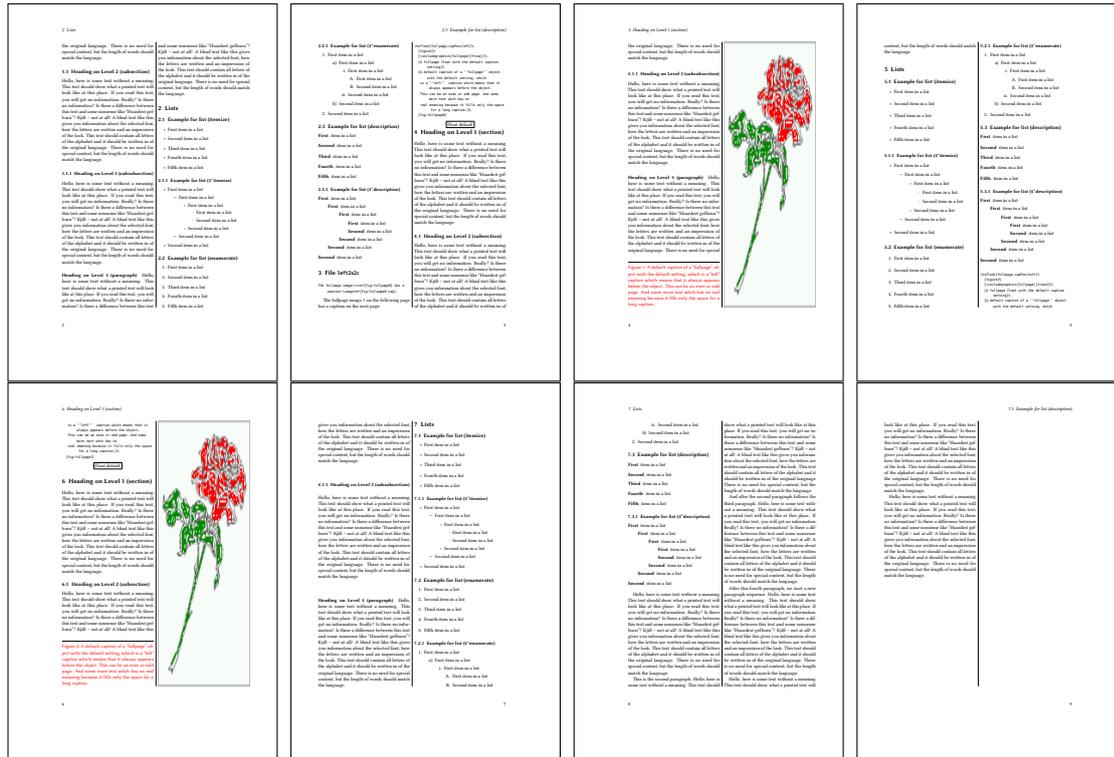


Figure 44: Output of left2s2c (pages 2-9)

19.1.1 Using capPos=after

The caption will be printed always right of the object which is the same as *after* the full page object. With capPos=after it is possible to get the caption in the twocolumn mode always in the right (second) column (see figure 46 on page 47)

```
\hvFloat[fullpage, capPos=after]{figure}%
{\includegraphics[fullpage]{images/rose}}%
[A float which needs the complete column width and height.]%
{A Caption of a "fullpage" object, which is on the left column.
This is always the right column on an even or odd page. And some more
```

19 Full page objects in twocolumn mode

text which has no real meaning because it fills only the space for a long caption.¹³
{fig:fullpage1-2}

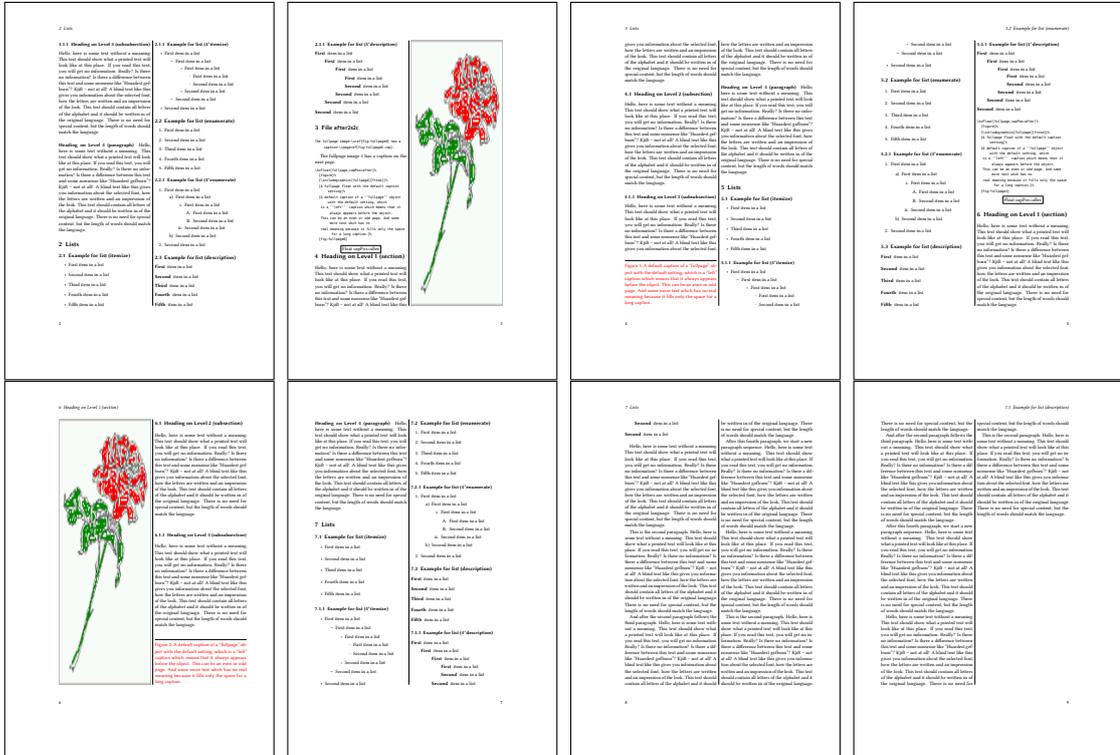


Figure 45: Output of after2s2c (pages 2–9)

The caption and the object can be on different pages (Figure 45). If you do not like this behaviour, then use the setting `capPos=right` instead of `capPos=after`. Figure `right2s2c` shows that caption and object in this case are always on the same page.

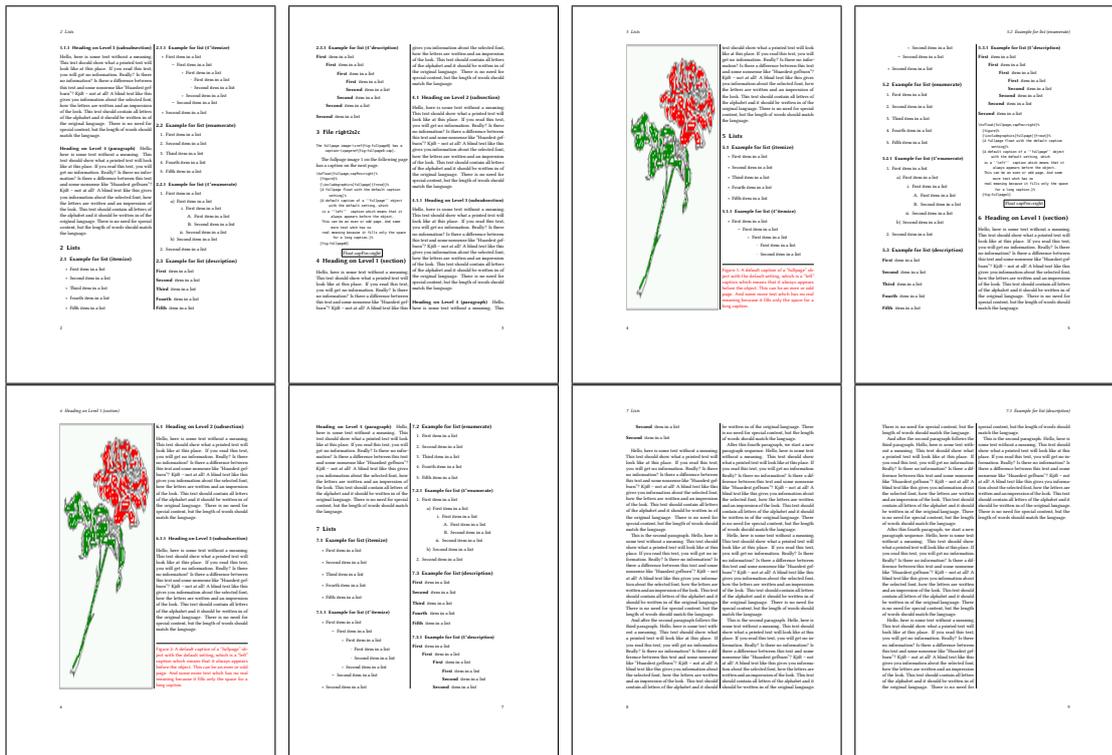


Figure 46: Output of right2s2c (pages 2–9)

19 Full page objects in twocolumn mode

19.1.4 Using capPos=inner – caption in the inner column

The caption will be printed in the right column for an even page and in the left column for an odd page.

```
\hFloat[fullpage,capPos=inner]{figure}{\includegraphics[fullpage]{images/rose}}%  
[A float which needs the complete column width and height.]%  
{A Caption of a "fullpage" object, which follows on the left or right column.  
This can be an even or odd page. And some more text which has no  
real meaning because it fills only the space for a long caption.}{fig:fullpage3-2}
```

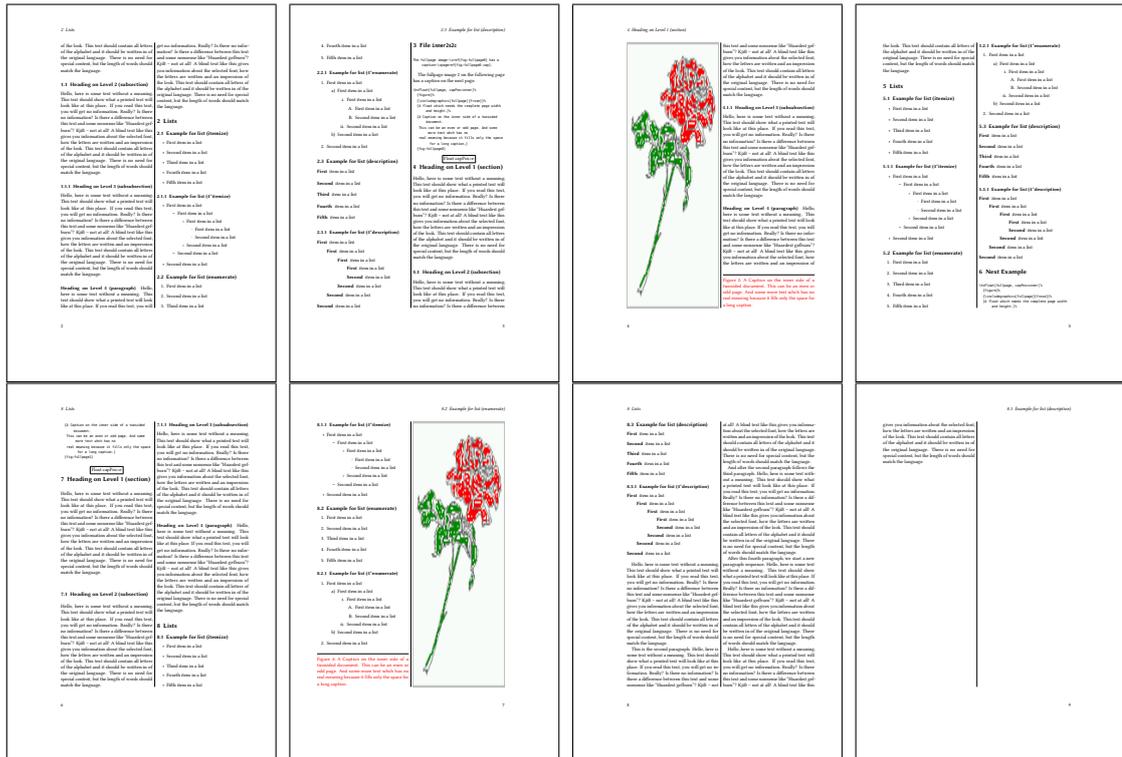


Figure 49: Output of inner2s2c (pages 2–9)

19.1.5 Using capPos=outer — caption on the outer column

The caption will be printed on the left column an odd page, the object can appear before or after this caption.

```
\hvFloat[fullpage, capPos=outer]{figure}%
{\includegraphics[fullpage]{images/rose}}%
[A float which needs the complete page width and height with \texttt{capPos=outer}.]%
{A Caption of a "fullpage" object, which has the caption position in the
outer page. This can be an even or odd page. And some more text which has no
real meaning because it fills only the space for a long caption.}{fig:fullpage2-2a}
```

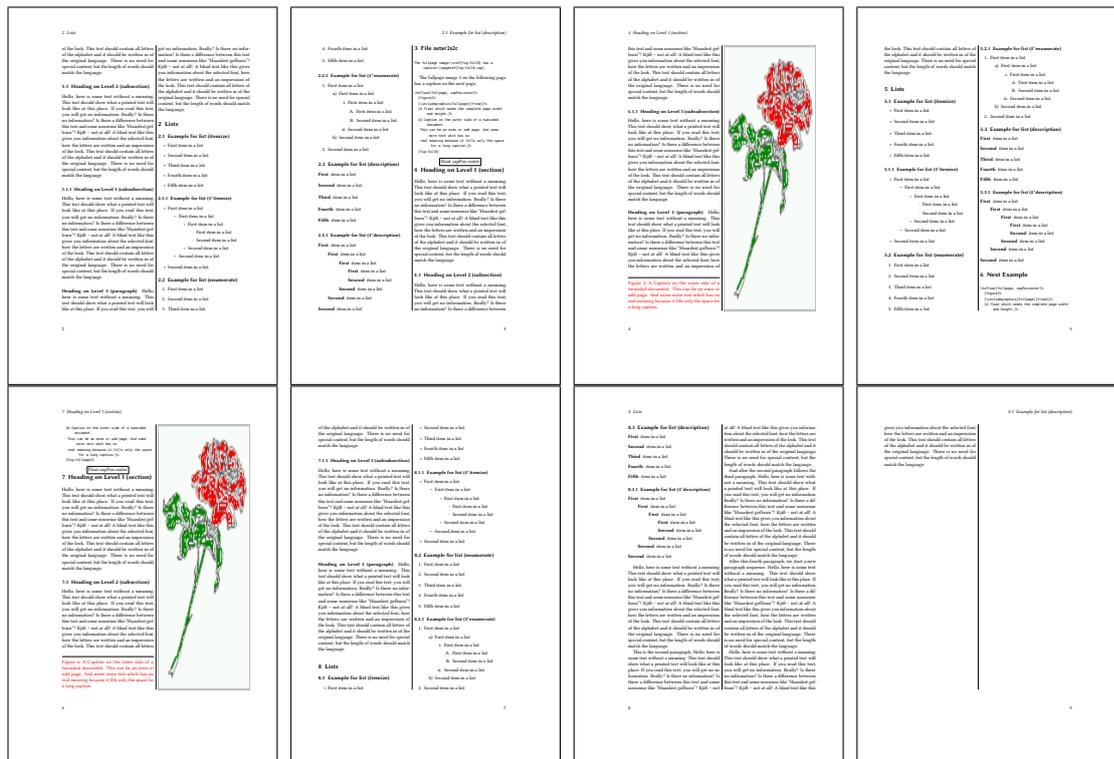


Figure 50: Output of outer2s2c (pages 2–9)

19 Full page objects in twocolumn mode

19.2 Using full page in twocolumn mode

With the star version of `\hvfloat` The object is placed over both columns, the whole page. In such a case the only useful caption position is `capPos=inner` for *inner*.

```
\hvfloat*[fullpage, capPos=inner]{figure}%  
{\includegraphics[FullPage]{images/rose}}%  
[A float which needs the complete page width and height with \texttt{capPos=outer}.]%  
{A caption of a "fullpage" object in twocolumn mode: It uses the star version  
of \textbackslash hvfloat. The object goes over both columns.}{fig:two}
```

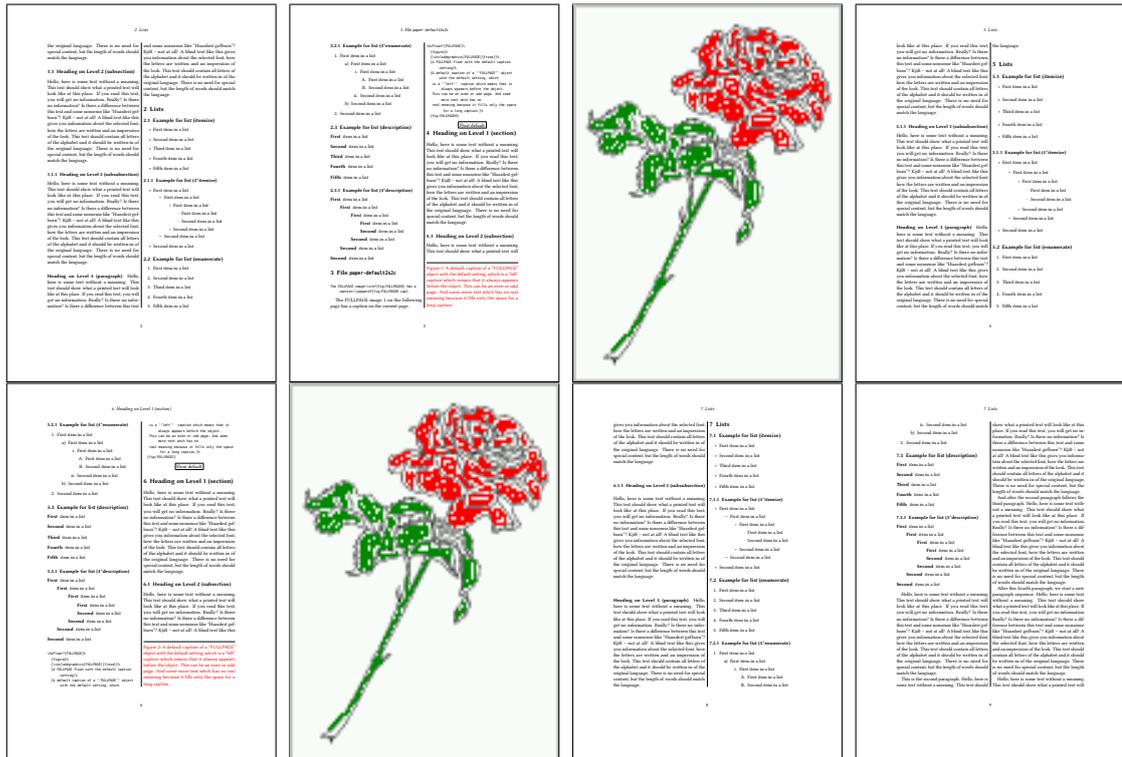


Figure 51: Output of paper-default2s2c (pages 2–9)

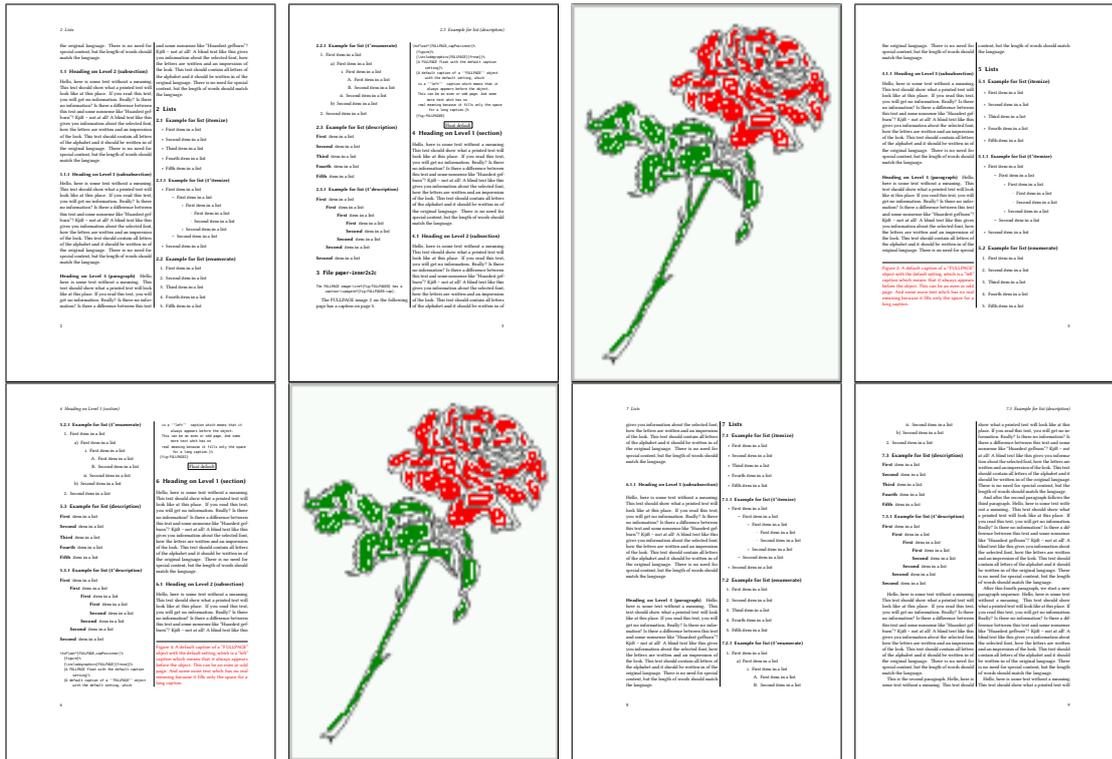


Figure 52: Output of paper-inner2s2c (pages 2–9)

19.3 Multifloats

Multifloats is the name for more than one image and/or tabular in *one* floating environment. Every image and/or tabular has its own caption, which is different to a subcaption. The + symbol defines an additional Object which will be part of the same floating environment. It's up too the user to be sure that one page or one column can hold all defined objects. Every object gets its own caption which is the reason why figures and tabulars and ... can be mixed:

```
\captionsetup{singlelinecheck=false}
\hvFloat[fullpage,multiFloat,capPos=inner]%
+{figure}{\includegraphics[height=0.4\textheight]{images/rose}}% no 1
[Short caption A]%
{A Caption A of a 'fullpage' object, which follows on the left or
right column. This can be an even or odd page. And some more text which has no
real meaning because it fills only the space for a long caption.}%
{multi:demo0}%
+{table}{\begin{tabular}{lr}\hline
Linksbündig & Rechtsbündig\\
L & R \\
left & right \\
\multicolumn{2}{c}{Multicolumn}\hline
% no 2
```

20 Subfloat page

```

\end{tabular}}%
[Short Caption B]%
{A Caption B of a "fullpage" object, which follows on the left or
right column. This can be an even or odd page.}%
}%
+{figure}{\includegraphics[height=0.4\textheight]{images/rose}}%% no 3
{A Caption C of a "fullpage" object, which follows on the left or
right column.}%
{multi:demol}

```

The page with the objects has no additional informations it holds only the figures and/or tabulars. If you want it like subfigures or subtabulars then go to section 18 on page 41. The setting `\captionsetup{singlelinecheck=false}` is needed if you want the captions always left aligned.

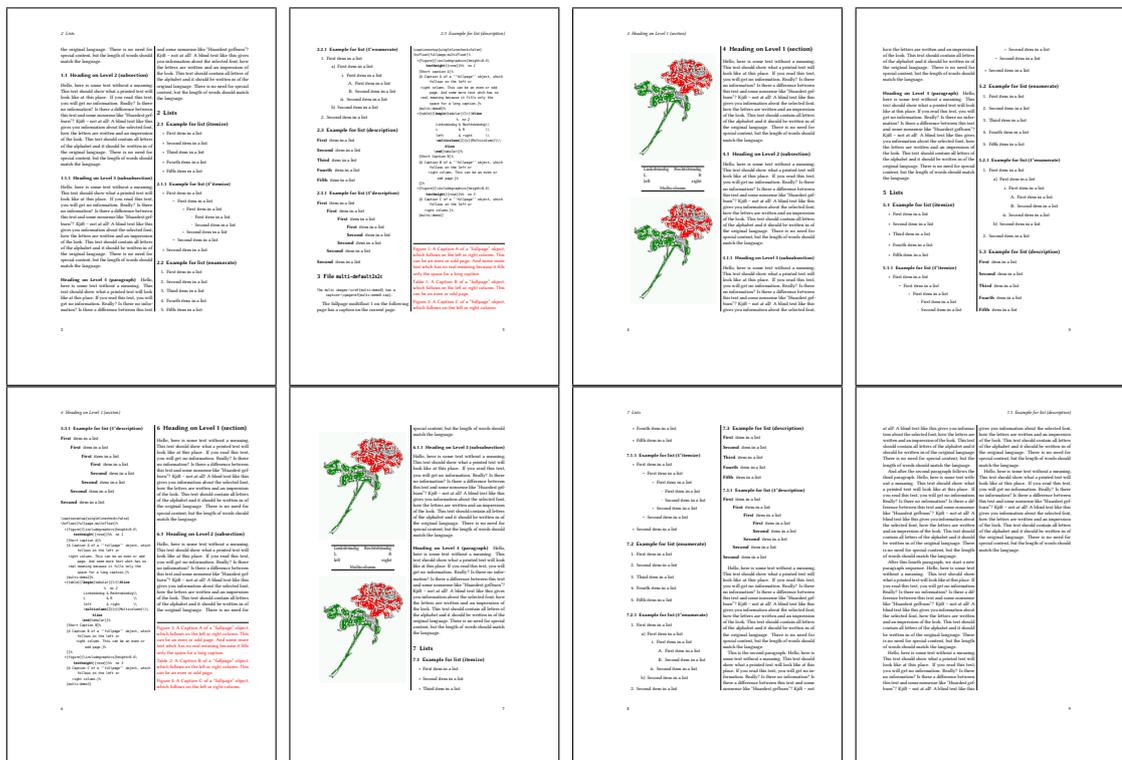


Figure 53: Output of multi-default2s2c (pages 2-9)

20 Subfloat page

A subfloat page can have only one type of floats which will have one main caption and individual subcaptions. Some arguments are ignored for a subfloat, one can leave them empty. The first line defines only the type and the main caption, the object entry is ignored! All additional lines will have the same float type, the reason why the float type entry is ignored.

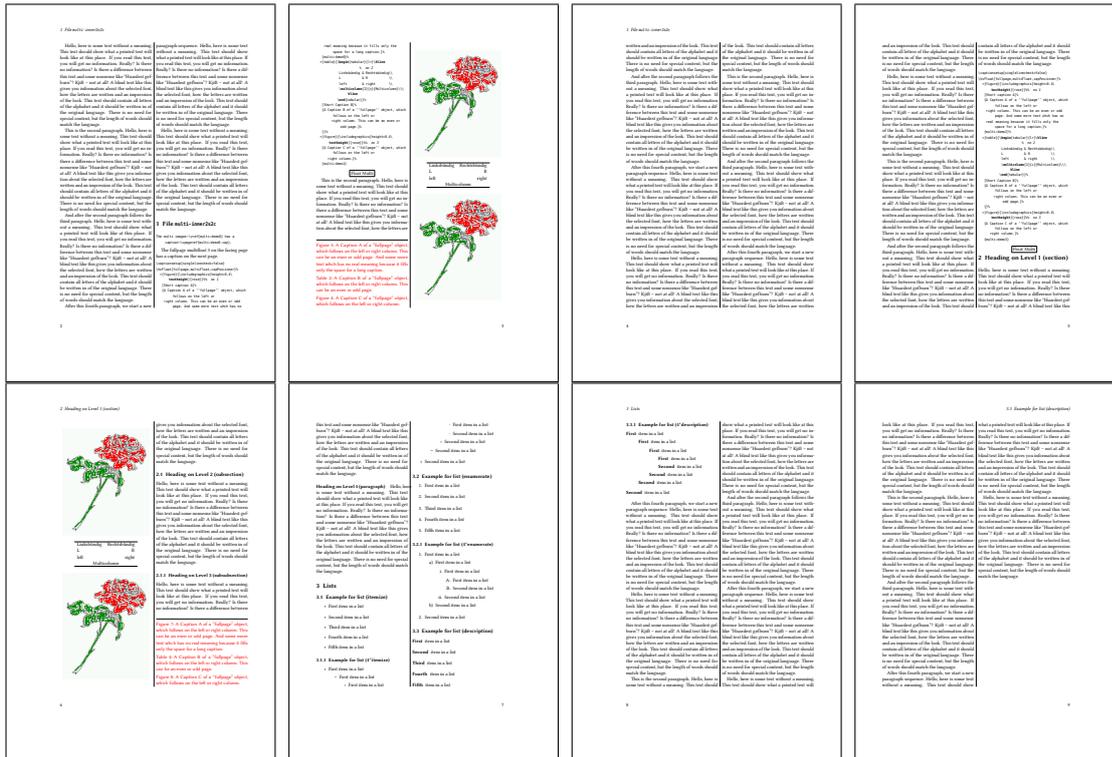


Figure 54: Output of multi-inner2s2c (pages 2-9)

```

\captionsetup[sub]{singlelinecheck}
\hvFloat[fullpage, capPos=before, objectFrame, subFloat]%
+{{figure}}{[Short main caption of the objects]}% main short lsi entry
{The main caption of a "fullpage" object, which follows on the left or
right column. This can be an even or odd page. And some more text which has no
real meaning because it fills only the space for a long caption.}% main caption
{sub:demo00}%
+{{\includegraphics[height=0.28\textheight]{images/rose}}}
[Short caption B]%
{A Caption B of a "fullpage" sub object.}% subcaption
}
+{{\includegraphics[height=0.28\textheight]{images/rose}}}
{A Caption C of a "fullpage" object, which follows on the left or right column.}%
{sub:demo10}
+{{\includegraphics[height=0.28\textheight]{images/rose}}}
{A Caption D of a "fullpage" object.}%
{sub:demo20}

```

The keyword subFloat defines the images or tabulars as subfloats. The package subcaption is loaded by default. For the subcaptions the singlelinecheck should be true (see listing).

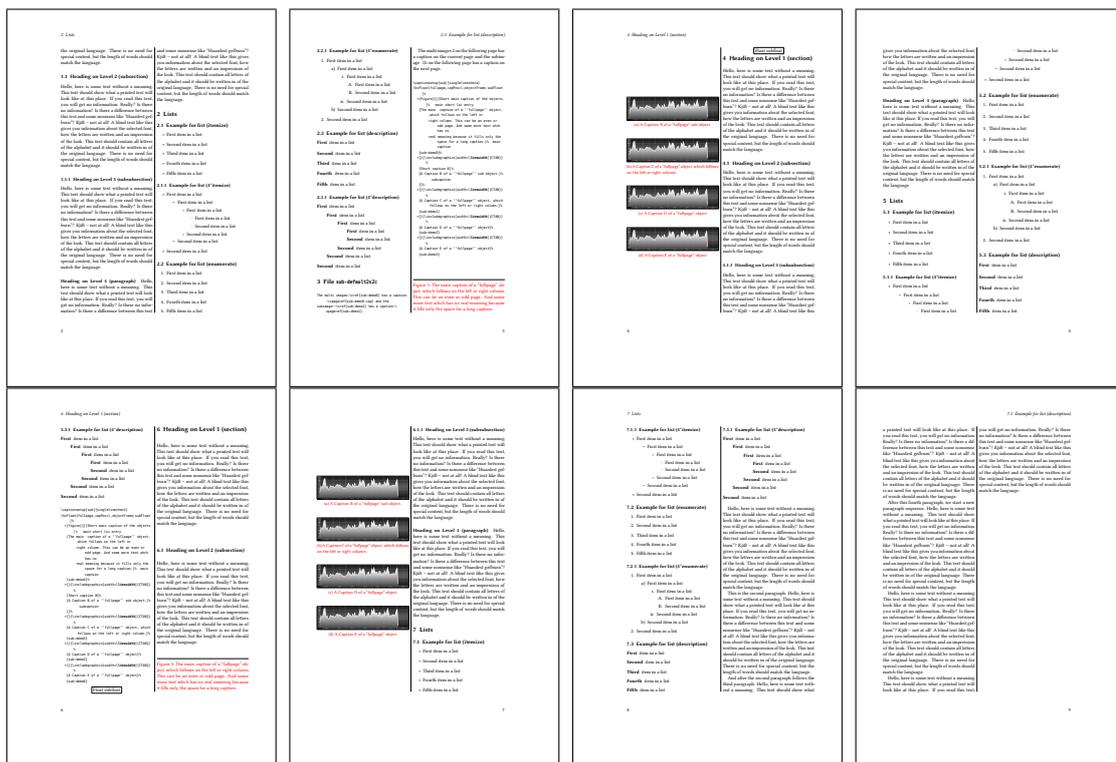


Figure 55: Output of sub-default2s2c (pages 2–9)

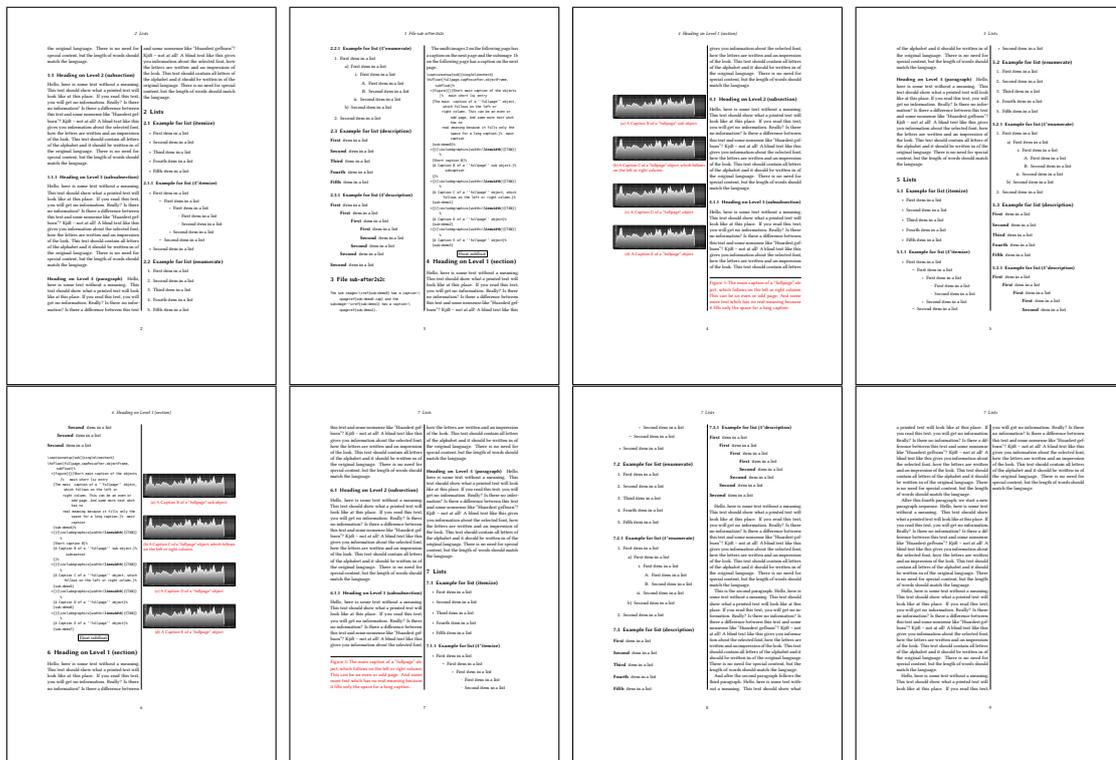


Figure 56: Output of sub-after2s2c (pages 2–9)

21 References to the page

With the command `\pageref` one can have a reference to the page number of a caption. For the `fullpage` option this can be the wrong page if someone wants a reference to the page where the object is set. Let's assume that we use something like

```
\setDefault{
\hvFloat[fullpage,capPos=evenPage]{figure}%
  {\IncludeGraphics{images/frose}}%
  [A float which needs the complete paper width and height.]%
  [A Caption of a "fullpage" object, which follows on the next page.
  This can be an even or odd page. The object uses the complete paper dimensions]%
  {demo:fullpage}
```

The label `demo:fullpage` is used for the *image* and not for the caption! Internally another label called `demo:fullpage-cap` is set on the caption page which can be before or behind the object (depending to the optional argument of `capPos`). For example:

The caption of figure-`\ref{demo:fullpage-cap}` is on page-`\pageref{demo:fullpage-cap}`, but the image itself is on page-`\pageref{demo:fullpage}`.

The caption of figure 58 is on page 58, but the image itself is on page 59. With package `varioref` it is:

With the package `\pack{varioref}` ([\url{https://ctan.org/pkg/varioref}](https://ctan.org/pkg/varioref)) one can get something like: see figure-`\vref{demo:fullpage}`, which uses a correct page number of the floating object and not the caption page number which is-`\vpageref{demo:fullpage-cap}`. The figure-`\ref{demo:fullpage}` is on page-`\pageref{demo:fullpage}` and the caption on page-`\pageref{demo:fullpage-cap}`

With the package `varioref` (<https://ctan.org/pkg/varioref>) one can get something like: see figure 58 on page 59, which uses a correct page number of the floating object and not the caption page number which is on the next page. The figure 58 is on page 59 and the caption on page 58

22 Defining a style

With `\defhvstyle` one can define a special style to get rid of the individual setting:

```
\defhvstyle{name}{setting}
```

For example:

```
\defhvstyle{RightCaption}{floatPos=htb, capWidth=0.5, capPos=after, capVPos=bottom, objectPos=center}
\hvFloat[style=RightCaption]{figure}{\includegraphics{images/rose}}%
  [Caption vertically centered right beside the float with a caption width of
  \texttt{0.5\textbackslash columnwidth}.]{fig:style}
```



Figure 57: Caption at bottom right beside the float with a caption width of 0.5\columnwidth .

23 Global float setting

Instead of writing the following sequence into the preamble:

```
\makeatletter  
\renewcommand\fps@figure{tb}  
\renewcommand\fps@table{t}  
\makeatother
```

you can change the global setting of floats by loading the package `hvfloat-fps`. It allows optional package options to set the global placement:

```
\usepackage[figure=tb,table=t]{hvfloat-fps}
```

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

Figure 58: A Caption of a “fullpage” object, which follows on the next page. This can be an even or odd page. The object uses the complete paper dimensions



Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

This is the second paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

And after the second paragraph follows the third paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

After this fourth paragraph, we start a new paragraph sequence. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

Index

A

\abovecaptionskip (skip), 7
\addtolength, 7
after (value), 8, 34f, 45f
afterpage (package), 7
atbegshi (package), 7

B

before (value), 8, 13, 32ff, 44
\belowcaptionskip (skip), 7
bottom (value), 8

C

capAngle (keyword), 8
capFormat (keyword), 9, 19
capPos (keyword), 8, 16, 20, 23, 32–37, 44ff,
48–52, 57
capVPos (keyword), 8
capWidth (keyword), 8, 11, 13
caption (package), 9
\caption, 9, 19
caption (package), 7, 19
\captionof, 31
\captionsetup, 19, 41f, 54
center (value), 8
\clearpage, 48f
\columnwidth (length), 11

D

\defhvstyle, 8, 10, 57

E

evenPage (value), 8, 32, 34, 36, 48
expl3 (package), 7

F

FULLPAGE (keyword), 32, 34, 38
false (value), 41, 54
fbox (package option), 7
\fbox, 7
\figcaption, 7, 10, 30
figure (environment), 9f, 28

float (package), 28
floatCapSep (keyword), 9
\floatCapSep (length), 20
floatCapSep (keyword), 10, 20
floatPos (keyword), 8, 24
\frame, 10
FullPage (keyword), 32
fullpage (keyword), 32, 34, 57
fullpage, 8

G

graphicx (package), 7

H

h (value), 13
\hvFloat, 7, 9f, 19, 28ff, 39, 41
\hvFloat*, 24
hvFloatEnv (environment), 10, 31
\hvOBox, 29
\hvSet, 7
\hvfloat, 52
hvfloat (package), 7, 32, 49
\hvfloat, 38
hvfloat (package), 7, 48
hvfloat-fps (package), 58
\hvset, 7
hypcap (package option), 7
hyperref (package), 7
hyperref (package option), 7

I

ifoddpaper (package), 7
\includegraphics, 38
\includgraphics, 32
inner (value), 8, 16, 32, 37, 50, 52

K

Keyword

- capPos, 16, 20, 23, 32f, 35ff, 44ff, 48–52
- capWidth, 13
- floatPos, 24
- objectPos, 20, 25

Index

- singlelinecheck, 41, 54

L

l (value), 25
left (value), 8, 13, 20, 32, 45
\linewidth (length), 12
\listoffigures, 7
lscape (package), 24

M

\marginparwidth (length), 9, 21
multiFloat (keyword), 34
multido (package), 7

N

nonFloat (keyword), 7, 9, 28
nonfloat (package), 28
nonfloat (keyword), 29

O

objectAngle (keyword), 8
objectFrame (keyword), 9f
objectPos (keyword), 8, 20, 25
oddPage (value), 8, 32, 34, 37, 49
onecolumn, 37
oneside, 33
onlyText (keyword), 29
outer (value), 8, 16, 23, 32, 37, 51

P

p (value), 24
\pageref, 57
\paperheight (length), 38
\paperwidth (length), 38
pdfscape (package), 24

R

right (value), 8, 46
rotAngle (keyword), 8
\rotatebox, 14

S

separatorLine (keyword), 34
\setDefault, 7, 10, 30
\setlength, 7

singlelinecheck (keyword), 41f, 54f
style (keyword), 9
subFloat (keyword), 34, 42, 55
subcapFormat (keyword), 9, 19
subcaption (package), 42
\subcaption, 9
subcaption (package), 7, 55
\subcaption, 19
\subcaptionsetup, 19

T

\tabcaption, 7, 10, 30
table (environment), 9f, 28
\textwidth (length), 9, 31
top (value), 8
twocolumn (package option), 32, 44
twocolumn, 8, 24, 32, 44
twoside (package option), 36, 44
twoside, 8, 15

U

use0Box (keyword), 9, 29

V

Value

- after, 35, 45f
- before, 32f, 44
- evenPage, 32, 36, 48
- false, 41, 54
- h, 13
- inner, 16, 32, 37, 50, 52
- l, 25
- left, 20, 32, 45
- oddPage, 32, 37, 49
- outer, 16, 23, 32, 37, 51
- p, 24
- right, 46
- w, 13

varioref (package), 57

W

w (value), 13
wide (keyword), 9f, 21

X

xkeyval (package), 7

24 The Package Source

```
1 %% $Id: hvfloat.sty 35 2020-10-31 07:41:00Z herbert $
2 %%
3 %%
4 %% IMPORTANT NOTICE:
5 %%
6 %% This is file 'hvfloat.sty',
7 %%
8 %% Herbert Voss <hvoss@tug.org>
9 %%
10 %% This program can be redistributed and/or modified under the terms
11 %% of the LaTeX Project Public License Distributed from CTAN archives
12 %% in directory macros/latex/base/lppl.txt.
13 %%
14 %% DESCRIPTION:
15 %% 'hvfloat' offers rotating of captions and objects for floats
16 %%
17 \NeedsTeXFormat{LaTeX2e}
18 \def\fileversion{2.17}
19 \def\filedate{2020/10/31}
20 \message{'hvfloat' v\fileversion, \filedate\space (Herbert Voss)}
21 \ProvidesPackage{hvfloat}[\filedate\ rotating of floating objects]
22 \let\hvFloatFileVersion\fileversion
23 %
24 \newif\ifhv@fbox \hv@fboxfalse
25 \newif\ifhv@hyperref \hv@hyperreffalse
26 \DeclareOption{fbox}{\hv@fboxtrue\setlength{\fboxsep}{1pt}}
27 \DeclareOption{hyperref}{\hv@hyperreftrue}
28
29 \ProcessOptions
30
31 \PassOptionsToPackage{hycap}{caption}
32 \RequirePackage{caption}
33 \PassOptionsToPackage{hycap}{subcaption}
34 \RequirePackage{subcaption}
35 \RequirePackage{atbegshi}
36
37 \RequirePackage{expl3,multido}
38 \RequirePackage{graphicx}
39
40 \RequirePackage{xkeyval}
41 \RequirePackage{ifoddpage}
42 \RequirePackage{afterpage}
43 %\RequirePackage{zref-abspos}
44
45 \ifhv@hyperref
46 \RequirePackage{hyperref}
47 % \RequirePackage{hycap}
48 \fi
49 %
50 %\unitlength=1cm
51 \providecommand*\LenToUnit[1]{\strip@pt\dimexpr#1*\p@/\unitlength}
```

24 The Package Source

```

52
53 \newlength\hvObjectWidth
54 \newlength\hvCapWidth
55 \newlength\hvWideWidth
56 \newlength\hvMultiFloatSkip
57 \newlength\hvMaxCapWidth
58 %\newlength\hv@BottomSpace
59 %\AtBeginDocument{%
60 % \setlength\hv@BottomSpace{\dimexpr\paperheight-\lin-\topmargin-\headheight-\headsep-\textheight}}
61
62 \newsavebox\hvObjectBox
63 \newsavebox\hvCaptionBox
64 \newsavebox\hvOBox
65 \newsavebox\@tempbox
66 \newsavebox\hv@caption@box
67
68 \newif\ifhv@capbeside \hv@capbesidefalse
69
70 \def\hv@Top{top}
71 \def\hv@Bottom{bottom}
72 \def\hv@After{after}
73 \def\hv@Before{before}
74 \def\hv@Right{right}
75 \def\hv@Left{left}
76 \def\hv@Center{center}
77 \def\hv@Outer{outer}
78 \def\hv@Inner{inner}
79 \def\hv@Even{evenPage}
80 \def\hv@Odd{oddPage}
81 \def\hv@Natural{n}
82 \def\hv@Width{w}
83 \def\hv@Height{h}
84 \def\hv@Zero{0}
85 %
86 \def\hv@figure{figure}
87 %
88 \define@key{hvSet}{floatPos}[htbp]{% LaTeX's position parameters htpb
89 \def\hvSet@floatPos{#1}%
90 }
91 \define@key{hvSet}{rotAngle}[0]{% rotates caption AND image together
92 \def\hvSet@rotAngle{#1}%
93 }
94 \define@key{hvSet}{capWidth}[n]{% (n)atural width|object (w)idth|object (h)eight|<scale of \columnwidth
95 >
96 \def\hvSet@capWidth{#1}%
97 }
98 \define@key{hvSet}{capAngle}[0]{% -360..+360
99 \def\hvSet@capAngle{#1}%
100 }
101 \define@key{hvSet}{capPos}[bottom]{% (l)eft|(b)ottom|(t)op|(r)ight|(i)inner|(o)uter|(e)ven|(o)(d)d
102 \def\hvSet@capPos{#1}% it is relativ to the object, (e),(d) only valid for fullpage float
103 \edef\@tempa{#1}%
104 \ifx\hv@Bottom\@tempa

```

```

104 \hv@capbesidefalse
105 \else
106 \ifx\hv@Top\@tempa
107 \hv@capbesidefalse
108 \else
109 \hv@capbesidetrue
110 \fi
111 \fi
112 }
113 \define@key{hvSet}{capVPos}[center]{% bottom|center|top
114 \def\hvSet@capVPos{#1}% it is relativ to the object
115 }
116 \define@key{hvSet}{objectPos}[center]{% (l)eft|(c)enter|(r)ight|(i)nnner|(o)uter
117 \def\hvSet@objectPos{#1}% it is relativ to the document
118 }
119 \define@key{hvSet}{objectAngle}[0]{% -360..+360
120 \def\hvSet@objectAngle{#1}%
121 }
122 \define@key{hvSet}{floatCapSep}[5pt]{% a width with the unit pt
123 \def\hvSet@floatCapSep{#1}%
124 }
125 \define@key{hvSet}{multiFloatSkip}{\normalbaselineskip}{% a width with the unit pt
126 \setlength\hvMultiFloatSkip{#1}%
127 }
128 \define@boolkey{hvSet}[hv@]{use0Box}[true]{}% use of the hv0Box contents
129 \define@boolkey{hvSet}[hv@]{nonFloat}[true]{}% Do not use float environment
130 \define@boolkey{hvSet}[hv@]{onlyText}[true]{}% Write the caption only as text
131 \define@boolkey{hvSet}[hv@]{wide}[true]{}% Write the caption only as text
132
133
134 \newif\ifhv@fullpage
135 \newif\ifhv@FULLPAGE
136
137 %\define@boolkey{hvSet}[hv@]{fullpage}[true]{}% fullpage float with caption on other page
138 %\define@boolkey{hvSet}[hv@]{FullPage}[true]{}% fullpage float with caption on other page
139 %\define@boolkey{hvSet}[hv@]{FULLPAGE}[true]{}% fullpage float with caption on other page
140
141 \define@key{hvSet}{fullpage}[true]{\global\@nameuse{hv@fullpage#1}}% wegen \afterpage problem
142 \define@key{hvSet}{FULLPAGE}[true]{\global\@nameuse{hv@FULLPAGE#1}}
143
144 \define@boolkey{hvSet}[hv@]{subFloat}[true]{% typeset values as subfloats
145 \ifhv@subFloat\setkeys{hvSet}{multiFloat=false}\fi%
146 }%
147 \define@boolkey{hvSet}[hv@]{multiFloat}[true]{% typeset values as continous floats
148 \ifhv@multiFloat\setkeys{hvSet}{subFloat=false}\fi%
149 }%
150 \define@boolkey{hvSet}[hv@]{separatorLine}[true]{}% separator line for caption of a full page float
151 \define@boolkey{hvSet}[hv@]{objectFrame}[true]{}% a frame around the object with no separation
152 \define@key{hvSet}{style}{%
153 \@ifundefined{hv@#1}%
154 {\errmessage{Custom style '#1' undefined}}%
155 {\begingroup
156 \edef\x{\endgroup\noexpand\setkeys{hvSet}{\@nameuse{hv@#1}}}\x}% use a defined style

```

24 The Package Source

```

157 }
158 \define@key{hvSet}{capFormat}[]{\def\hv@caption@format{#1}}%
159 \define@key{hvSet}{subcapFormat}[]{\def\hv@subcaption@format{#1}}%
160
161 \def\hv@set#1{\begingroup\edef\x{\endgroup\noexpand\setkeys{hvSet}{#1}}\x}
162 \let\hvFloatSet\hv@set
163 %
164 \def\defhvstyle#1#2{\@namedef{hv@#1}{#2}}
165 %
166 \newcommand{\setDefaults}{%
167   \hv@set{%
168     floatPos=htbp, rotAngle=0, capWidth=n, capAngle=0,
169     capPos=bottom, capVPos=center, objectPos=center, objectAngle=0,
170     floatCapSep=5pt, useOBox=false, nonFloat=false,
171     onlyText=false, wide=false, fullpage=false, FULLPAGE=false,
172     multiFloat=false, subFloat=false,
173     separatorLine, objectFrame=false, multiFloatSkip=\normalbaselineskip,
174     capFormat={}, subcapFormat={},
175   }%
176 }
177 \newcommand\reset@special@float{%
178   \hv@set{subFloat=false,%fullpage=false,
179     multiFloat=false,%FULLPAGE=false
180 }}
181
182 \def\hv@vskip{\vspace{\hvMultiFloatSkip}}
183
184 %
185 \newlength\hvAboveCaptionSkip
186 \newlength\hvBelowCaptionSkip
187 \newcount\hv@capPos
188
189 \newlength\fbboxlinewidth
190 \AtBeginDocument{%
191   \setlength\fbboxlinewidth{\dimexpr\linewidth-2\fbboxrule-2\fbboxsep}%
192 }
193 \setlength\belowcaptionskip{\abovecaptionskip}% it is in latex.ltx = 0pt
194 \newcommand\saveCaptionSkip{%
195   \setlength{\hvAboveCaptionSkip}{\abovecaptionskip}
196   \setlength{\hvBelowCaptionSkip}{\belowcaptionskip}
197   \setlength{\abovecaptionskip}{0pt}
198   \setlength{\belowcaptionskip}{0pt}
199 }
200 \newcommand{\restoreCaptionSkip}{%
201   \setlength\abovecaptionskip{\hvAboveCaptionSkip}%
202   \setlength\belowcaptionskip{\hvBelowCaptionSkip}%
203 }
204 %
205 \newcommand\figcaption[2][\def@captive{figure}%
206   \begingroup
207   \ifx\relax\hv@caption@format\relax\else\expandafter\captionsetup\expandafter{\hv@caption@format}\fi
208   \ifx\relax#1\relax \caption{#2}\else\caption{#1}{#2}\fi
209   \endgroup}

```

```

210 \newcommand\tabcaption[2][\def\capttype{table}%
211 \begingroup
212 \ifx\relax\hv@caption@format\relax\else\expandafter\captionsetup\expandafter{\hv@caption@format}\fi
213 \ifx\relax#1\relax \caption{#2}\else\caption[#1]{#2}\fi
214 \endgroup}
215 %
216 \newlength\hv@maxImageWidth
217 \AtBeginDocument{\hv@maxImageWidth=\columnwidth}
218
219 \define@key{Gin}{fullpage}[true]{%
220 \def\Gin@ewidth{\columnwidth}%
221 \def\Gin@eheight{\textheight}%
222 \Gin@boolkey{false}{iso}%
223 }
224 \define@key{Gin}{FullPage}[true]{%
225 \def\Gin@ewidth{\textwidth}%
226 \def\Gin@eheight{\textheight}%
227 \Gin@boolkey{false}{iso}%
228 }
229 \define@key{Gin}{FULLPAGE}[true]{%
230 \def\Gin@ewidth{\paperwidth}%
231 \def\Gin@eheight{\paperheight}%
232 \Gin@boolkey{false}{iso}%
233 }
234 \newcommand\IncludeGraphics[2][\%
235 % \newpage
236 %\iffalse
237 \vspace*{\the\dimexpr-\voffset+\topskip-\headheight-0.5\baselineskip}%
238 \leavevmode\checkoddpage
239 \ifoddpage
240 \hspace*{\dimexpr-\oddsidemargin-\parindent-\lin}%
241 \else
242 \hspace*{\dimexpr-\evensidemargin-\parindent-\lin}%
243 \fi\noindent
244 \includegraphics[#1,width=\paperwidth,height=\paperheight,keepaspectratio=false]{#2}%
245 %\fi
246 % \includepdf[#1],width=\paperwidth,height=\paperheight,keepaspectratio=false]
247 % {#2}%
248 }
249
250 \newcommand\put@CaptionBox[1][0]{%
251 \ifcase#1
252 \ifhv@fbox
253 \fbox{\parbox{\wd\hvCaptionBox}{\usebox{\hvCaptionBox}}}%
254 \else
255 \parbox{\wd\hvCaptionBox}{\usebox{\hvCaptionBox}}%
256 \fi
257 \or
258 \ifhv@fbox
259 \fbox{\raisebox{-\height}{\usebox{\hvCaptionBox}}}%
260 \else
261 \raisebox{-\height}{\usebox{\hvCaptionBox}}%
262 \fi

```

24 The Package Source

```

263 \or
264 \ifhv@fbox\fbbox{\usebox{\hvCaptionBox}}\else\usebox{\hvCaptionBox}\fi
265 \fi
266 }
267
268 \newcommand\put@ObjectBox[1][0]{%
269 \ifcase#1
270 \ifhv@fbox
271 \fbbox{\parbox{\wd\hvObjectBox}{\usebox{\hvObjectBox}}}%
272 \else
273 \parbox{\wd\hvObjectBox}{\ifhv@objectFrame\frame{\usebox{\hvObjectBox}}\else\usebox{\hvObjectBox}\fi}%
274 \fi
275 \or
276 \ifhv@fbox
277 \fbbox{\raisebox{-\height}{\usebox{\hvObjectBox}}}%
278 \else
279 \raisebox{-\height}{\ifhv@objectFrame\frame{\usebox{\hvObjectBox}}\else\usebox{\hvObjectBox}\fi}%
280 \fi
281 \or
282 \ifhv@fbox
283 \fbbox{\usebox{\hvObjectBox}}%
284 \else
285 \ifhv@objectFrame\frame{\usebox{\hvObjectBox}}\else\usebox{\hvObjectBox}\fi%
286 \fi
287 \fi
288 }
289
290 \newif\ifhv@star
291 \newif\ifhvsustar
292 \setDefault
293
294 \def\hvFloat{\@ifnextchar*% Main macro
295 {\global\hv@startrue\hv@maxImageWidth=\textwidth\hvFloat@i}%
296 {\global\hv@starfalse\hv@maxImageWidth=\columnwidth\hvFloat@i*}%
297 }
298
299 %\newcommand*\hvFloat{5}[]+{%
300 % [#1]: keyvalues
301 % #2: type figure | table | ...
302 % #3: float contents
303 % [#4]: short caption
304 % #5: caption
305 % #6: label
306 %
307 \def\hvFloat@i*{\@ifnextchar[{\do@hvFloat}{\do@hvFloat[]}}
308
309 \def\do@hvFloat[#1]{%
310 \begingroup
311 \setlength\hvWideWidth{\dimexpr\linewidth+\marginparwidth}%
312 \hv@maxImageWidth=\textwidth
313 % |hv@cappbesidefalse
314 \reset@special@float
315 \setcounter{hv@pfigure}{\value{figure}}%

```

```

316 \setcounter{hv@ptable}{\value{table}}%
317 \gdef\hv@save@setting{#1}%
318 \ifx\relax#1\relax\else\setkeys{hvSet}{#1}\fi
319 \gdef\hv@floatType{figure}%
320 \@ifnextchar+{\do@multiFloat}{\hvFloat@ii[#1]}%
321
322 \ExplSyntaxOn
323
324 \def\do@multiFloat+#1#2{%
325 \clist_set:Nn\l_clist_Type{#1}%
326 \clist_set:Nn\l_clist_Object{#2}%
327 \@ifnextchar[\do@multiFloat@i{\do@multiFloat@ii}%
328 }
329 \def\do@multiFloat@i[#1]#2#3{% lof-caption, caption, label
330 \ifx\relax#1\relax
331 \clist_set:Nn\l_clist_LofCaption{}%
332 \else
333 \clist_set:Nn\l_clist_LofCaption{#1}%
334 \fi
335 \clist_set:Nn\l_clist_Caption{#2}%
336 \ifx\relax#3\relax
337 \clist_set:Nn\l_clist_Label{}%
338 \else
339 \clist_set:Nn\l_clist_Label{#3}%
340 \fi
341 \@ifnextchar+{\do@multiFloat@ii}{}%
342 }
343 \def\do@multiFloat@ii+#1#2{%
344 \clist_put_right:Nn\l_clist_Type{#1}%
345 \clist_put_right:Nn\l_clist_Object{#2}%
346 \@ifnextchar[\do@multiFloat@iii{\do@multiFloat@iii[]}%
347 }
348
349 \def\do@multiFloat@iii[#1]#2#3{% lof-caption, caption, label
350 \ifx\relax#1\relax
351 \clist_put_right:Nn\l_clist_LofCaption{}%
352 \else
353 \clist_put_right:Nn\l_clist_LofCaption{#1}%
354 \fi
355 \clist_put_right:Nn\l_clist_Caption{#2}%
356 \ifx\relax#3\relax
357 \clist_put_right:Nn\l_clist_Label{}%
358 \else
359 \clist_put_right:Nn\l_clist_Label{#3}%
360 \fi
361 \@ifnextchar+\do@multiFloat@ii%
362 {\def\hvSet@CapWidth{n}%
363 \do@@@hvFloat}%
364 }
365 \ExplSyntaxOff
366
367
368 \newcounter{hv@pfigure}

```

24 The Package Source

```

369 \newcounter{hv@ptable}
370 \newcounter{subhv@pfigure}
371 \newcounter{subhv@ptable}
372
373 \def\drawSepLine{%
374   \par\noindent
375   \if@twocolumn\rule{\columnwidth}{0.4pt}\else\rule{\linewidth}{0.4pt}\fi
376   \vspace{0pt}%
377 }
378
379 \newcount\hv@canta
380 \newcount\hv@cantb
381
382
383 \def\hvFloat@ii[#1]#2#3{%
384   \hv@maxImageWidth=\textwidth
385   % |hv@capbesidefalse
386   \ifx\relax#1\relax\else\setkeys{hvSet}{#1}\fi
387   \gdef\hv@floatType{#2}%
388   \ifx\relax#2\relax \setkeys{hvSet}{nonFloat=true}\fi
389   \gdef\hv@floatObject{#3}%
390   \@ifnextchar[{\do@hvFloat}{\do@hvFloat[]}%
391 }
392 \def\do@hvFloat[#1]#2#3{%
393   \gdef\hv@shortCap{#1}%
394   \gdef\hv@longCap{#2}%
395   \gdef\hv@label{#3}%
396   \ifhv@fullpage
397     \def\hvSet@CapWidth{n}% relative value
398     \do@@@hvFloat% fullpage with caption on other page
399   \else
400     \ifhv@FULLPAGE
401       \def\hvSet@CapWidth{n}% relative value
402       \do@@@hvFloat% fullpage with caption on other page
403     \else
404       \do@@@hvFloat
405     \fi
406   \fi
407 }
408 %
409 \def\do@@@hvFloat{% no special float page
410   \def\@tempa{90}%
411   \ifx\hvSet@rotAngle\@tempa
412     \setlength\hvMaxCapWidth{\textheight}%
413   \else
414     \setlength\hvMaxCapWidth{\hvWideWidth}%
415   \fi
416 %
417 % First we save the object in \hvObjectBox
418 %
419   \ifx\hvSet@objectAngle\hv@Zero % rotate the object?
420     \savebox{\hvObjectBox}{\ifhv@useOBox\usebox{\hvOBox}\else\hv@floatObject\fi}%
421   \else

```

```

422 \savebox{\hvObjectBox}{%
423 \rotatebox{\hvSet@objectAngle}{%
424 \ifhv@useOBox\usebox{\hvOBox}\else\hv@floatObject\fi
425 }%
426 }%
427 \fi
428 \setlength\hvObjectWidth{\wd\hvObjectBox}%
429 %
430 % Now we save the caption with its defined \hvCapWidth
431 %
432 \ifx\hvSet@capWidth\hv@Width% captionwidth=objectwidth
433 \setlength\hvCapWidth{\hvObjectWidth}%
434 \else
435 \ifx\hvSet@capWidth\hv@Height% captionwidth=objectheight
436 \setlength\hvCapWidth{\ht\hvObjectBox}%
437 \else
438 \ifx\hvSet@capWidth\hv@Natural% captionwidth=\linewidth-\objectwidth-separation
439 \ifhv@capbeside
440 \ifhv@wide
441 \setlength\hvCapWidth{\the\dimexpr\hvWideWidth-\hvObjectWidth-\hvSet@floatCapSep\relax}%
442 \else
443 \ifhv@star
444 \setlength\hvCapWidth{\the\dimexpr\textwidth-\hvObjectWidth-\hvSet@floatCapSep\relax}%
445 \else
446 \setlength\hvCapWidth{\the\dimexpr\linewidth-\hvObjectWidth-\hvSet@floatCapSep\relax}%
447 \fi
448 \fi
449 \else
450 \setlength\hvCapWidth{\columnwidth}%
451 \fi
452 \else
453 \ifhv@capbeside
454 \ifhv@wide
455 \setlength\hvCapWidth{\hvSet@capWidth\hvWideWidth}%
456 \setlength\@tempdima{\the\dimexpr\hvWideWidth-\hvObjectWidth-\hvSet@floatCapSep\relax}%
457 \else
458 \setlength\hvCapWidth{\hvSet@capWidth\columnwidth}%
459 \setlength\@tempdima{\the\dimexpr\columnwidth-\hvObjectWidth-\hvSet@floatCapSep\relax}%
460 \fi
461 \ifdim\hvCapWidth>\@tempdima
462 \setlength\hvCapWidth{\@tempdima}%
463 \fi
464 \else
465 \ifhv@wide
466 \setlength\hvCapWidth{\hvSet@capWidth\hvWideWidth}%
467 \else
468 \setlength\hvCapWidth{\hvSet@capWidth\columnwidth}%
469 \fi
470 \fi
471 \fi
472 \fi
473 \fi
474 \saveCaptionSkip % we put this space ourselves

```

24 The Package Source

```

475 \ifx\hvSet@capAngle\hv@Zero      % need rotation?
476   \sbox\hvCaptionBox{% NO rotation
477     \begin{minipage}[b]{\hvCapWidth}% minipage, to get hyphenation
478     \ifx\relax\hv@caption@format\relax\else\expandafter\captionsetup\expandafter{\hv@caption@format}\fi
479     \ifhv@nonFloat
480     \ifhv@onlyText\hv@longCap
481     \else
482       \ifx\hv@floatType\hv@figure
483         \ifx\relax\hv@shortCap\relax
484           \figcaption{\hv@longCap\expandafter\label\expandafter{\hv@label}}%
485         \else
486           \figcaption[\hv@shortCap]{\hv@longCap\expandafter\label\expandafter{\hv@label}}%
487         \fi
488       \else
489         \ifx\relax\hv@shortCap\relax
490           \tabcaption{\hv@longCap\expandafter\label\expandafter{\hv@label}}%
491         \else
492           \tabcaption[\hv@shortCap]{\hv@longCap\expandafter\label\expandafter{\hv@label}}%
493         \fi
494       \fi
495     \fi
496   \else
497     \let\@captype\hv@floatType
498     \expandafter\ifx\expandafter\relax\hv@shortCap\relax
499       \caption{\hv@longCap\expandafter\label\expandafter{\hv@label}}%
500     \else
501       \caption[\hv@shortCap]{\hv@longCap\expandafter\label\expandafter{\hv@label}}%
502     \fi
503   \fi
504 % \expandafter\label\expandafter{\hv@label}% 2.17 put label into the caption argument
505   \end{minipage}%
506 }%
507 \else
508   \sbox\hvCaptionBox{% Rotation
509     \rotatebox{\hvSet@capAngle}{%
510       \begin{minipage}[b]{\hvCapWidth}% minipage, to get hyphenation
511       \ifx\relax\hv@caption@format\relax\else\expandafter\captionsetup\expandafter{\hv@caption@format}\fi
512       \ifhv@nonFloat
513       \ifhv@onlyText\hv@longCap
514       \else
515         \ifx\hv@floatType\hv@figure
516           \ifx\relax\hv@shortCap\relax \figcaption{\hv@longCap}\else\figcaption[\hv@shortCap]{\hv@longCap}\fi
517         \else
518           \ifx\relax\hv@shortCap\relax \tabcaption{\hv@longCap}\else\tabcaption[\hv@shortCap]{\hv@longCap}\fi
519         \fi
520       \fi
521     \else
522       \let\@captype\hv@floatType
523       \expandafter\ifx\expandafter\relax\hv@shortCap\relax \caption{\hv@longCap}\else\caption[\hv@shortCap]{\hv@longCap}\fi
524     \fi
525     \label{\hv@label}%
526   \end{minipage}%

```

```

527     }% rotatebox
528   }% lsbbox
529   \fi
530 %
531 % now we have the object and the caption with the right
532 % rotated angles saved in different boxes
533 %%
534 \restoreCaptionSkip% save old values
535 \def\fps@figure{\hvSet@floatPos}%
536 \ifhv@nonFloat
537   \begingroup%      Start the nonfloat part
538 \else
539   \ifhv@star
540     \@nameuse{\hv@floatType*}%  Start the floating environment *****
541   \else
542     \begin{\hv@floatType} %  Start the floating environment
543   \fi
544 \fi
545 \checkoddpages
546 \ifx\hvSet@objectPos\hv@Right\raggedleft\fi
547 \ifx\hvSet@objectPos\hv@Center
548   \ifhv@nonFloat\hspace*{\fill}\else\centering\fi
549 \fi
550 \ifx\hvSet@objectPos\hv@Outer
551   \ifoddpages\raggedleft\fi
552 \fi
553 \ifx\hvSet@objectPos\hv@Inner
554   \ifoddpages\else\raggedleft\fi
555 \fi
556 %
557 % to rotate object and caption together, we save all in another box
558 % the caption comes first, if its on the left or the top
559 % 0 caption left, inner and odd page, oneside inner
560 % 1 caption top
561 % 2 caption right, inner and even page, oneside outer
562 % 3 caption bottom
563 %
564 \ifx\hvSet@capPos\hv@Left
565   \hv@@capPos=0
566 \else
567   \ifx\hvSet@capPos\hv@Top
568     \hv@@capPos=1
569   \else
570     \ifx\hvSet@capPos\hv@Right
571       \hv@@capPos=2
572     \else
573       \ifx\hvSet@capPos\hv@Bottom
574         \hv@@capPos=3
575       \else
576         \ifx\hvSet@capPos\hv@Inner
577           \ifoddpages\oneside\hv@@capPos=0\else\hv@@capPos=2\fi
578         \else
579           \ifx\hvSet@capPos\hv@Outer

```

24 The Package Source

```

580         \ifoddpageoroneside\hv@capPos=2\else\hv@capPos=0\fi
581     \else
582         \ifx\hvSet@capPos\hv@Before
583             \hv@capPos=0 % same as capPos=right
584         \else
585             \ifx\hvSet@capPos\hv@After
586                 \hv@capPos=2 % same as capPos=right
587             \fi
588         \fi
589     \fi
590 \fi
591 \fi
592 \fi
593 \fi
594 \fi
595 %%%
596 \savebox{\@tempboxa}{%          ***** @tempbox start
597     \expandafter\ifcase\the\hv@capPos% 0 is LEFT    START \ifcase
598     \ifx\hvSet@capVPos\hv@Center
599         \put@CaptionBox
600         \hspace{\hvSet@floatCapSep}% capfloatsep
601         \put@ObjectBox
602     \else
603         \ifx\hvSet@capVPos\hv@Top% caption and object at top aligned
604             \put@CaptionBox[1]%
605             \hspace{\hvSet@floatCapSep}% capfloatsep
606             \put@ObjectBox[1]%
607         \else% caption on bottom
608             \put@CaptionBox[2]%
609             \hspace{\hvSet@floatCapSep}% capfloatsep
610             \put@ObjectBox[2]%
611         \fi
612     \fi% end caption left
613     \or%1 is top
614         \ifdim\wd\hvCaptionBox>\wd\hvObjectBox
615         \begin{minipage}{\wd\hvCaptionBox}%
616             \else
617         \begin{minipage}{\wd\hvObjectBox}%
618             \fi
619         \centering
620         \ifhv@fbox
621         \fbox{\usebox{\hvCaptionBox}}\[\hvBelowCaptionSkip]%
622         \fbox{\usebox{\hvObjectBox}}%
623         \else
624         \usebox{\hvCaptionBox}\[\hvBelowCaptionSkip]%
625         \usebox{\hvObjectBox}%
626         \fi
627         \end{minipage}%
628     \or %2 is right
629         \ifx\hvSet@capVPos\hv@Center
630             \put@ObjectBox
631         \hspace{\hvSet@floatCapSep}%
632         \put@CaptionBox

```

```

633     \else
634 \ifx\hvSet@capVPos\hv@Top
635     \put@ObjectBox[1]%
636     \hspace{\hvSet@floatCapSep}% capfloatsep
637     \put@CaptionBox[1]%
638 \else
639     \put@ObjectBox[2]%
640     \hspace{\hvSet@floatCapSep}% capfloatsep
641     \put@CaptionBox[2]%
642 \fi
643     \fi
644 \or %3 bottom
645 \ifdim\wd\hvCaptionBox>\wd\hvObjectBox
646     \begin{minipage}{\wd\hvCaptionBox}%
647     \else
648     \begin{minipage}{\wd\hvObjectBox}%
649     \fi
650 \centering
651 \ifhv@fbox
652     \fbox{\usebox{\hvObjectBox}}\[\hvAboveCaptionSkip]%
653     \fbox{\usebox{\hvCaptionBox}}%
654 \else
655     \ifhv@objectFrame\frame{\usebox{\hvObjectBox}}\else\usebox{\hvObjectBox}\fi\[\hvAboveCaptionSkip]%
656     \usebox{\hvCaptionBox}%
657 \fi
658 \end{minipage}%
659 \fi% \ifcase\the\hv@capPos
660 }% End savebox Object and caption          %%%%%%%%% @tempboxa
661 %
662 % now we rotate the object and caption, if needed
663 %
664 \ifhv@wide
665     \ifoddpagoroneside\else\ifoddpag\else\hspace*{-\marginparwidth}\fi\fi% <- for wide and left page
666 \fi
667 \ifx\hvSet@rotAngle\hv@Zero
668     \usebox{\@tempboxa}%
669 \else
670     \rotatebox{\hvSet@rotAngle}{\usebox{\@tempboxa}}%
671 \fi
672 \ifhv@nonFloat
673     \ifx\hvSet@objectPos\hv@Center
674         \ifhv@nonFloat
675             \hspace{\fill}%
676             \fi
677         \fi
678     \endgroup% End the nonfloat part
679 \else
680     \ifhv@star
681         \@nameuse{end\hv@floatType}% End the floating environment
682     \else
683         \end{\hv@floatType}% End the floating environment
684     \fi
685 \fi

```

24 The Package Source

```

686 \endgroup% started at main \hvFloat
687 }
688 %
689 \newenvironment{hvFloatEnv}[1][\textwidth]
690 {\minipage{#1}\center}
691 {\endcenter\endminipage}
692 %
693
694 \ExplSyntaxOn
695 \let\clist@item@Nn\clist_item:Nn
696 \let\l@clist@Type\l_clist_Type
697 \let\l@clist@LofCaption\l_clist_LofCaption
698 \let\l@clist@Label\l_clist_Label
699 \let\clist@count@N\clist_count:N
700 \ExplSyntaxOff
701
702 \def\do@@@hvFloat{% special float page: caption <-> fullpage image
703 \ifx\hvSet@capPos\hv@After \hv@@capPos=1
704 \else
705 \ifx\hvSet@capPos\hv@Even \hv@@capPos=2
706 \else
707 \ifx\hvSet@capPos\hv@Odd \hv@@capPos=3
708 \else
709 \ifx\hvSet@capPos\hv@Inner \hv@@capPos=4
710 \else
711 \ifx\hvSet@capPos\hv@Outer \hv@@capPos=5
712 \else
713 \ifx\hvSet@capPos\hv@Right \hv@@capPos=6 % only for twocolumn mode
714 \else
715 \ifx\hvSet@capPos\hv@Left \hv@@capPos=7 % only for twocolumn mode
716 \else
717 \hv@@capPos=0
718 \fi
719 \fi
720 \fi
721 \fi
722 \fi
723 \fi
724 \fi
725 \checkoddpage
726 \set@caption@object% set caption and object into a box
727 \ifcase\hv@@capPos% caption before object 0-> _always_ left
728 \setBottomCaption\setPageObject
729 \or% caption after object 1-> _always_ right
730 \setPageObject\setBottomCaption
731 \or% caption on even page 2-> left page
732 \ifoddpage
733 \afterpage{\setBottomCaption\setPageObject}%
734 \else% we are on an even page
735 % |zsaveposy{hv@currentPos}%
736 % |ifdim\the\dimexpr|zposy{hv@currentPos}sp-\hv@BottomSpace-1cm>\ht\TBox % enough space*
737 \setBottomCaption\setPageObject
738 % |else

```

```

739 % \afterpage{\afterpage{\setBottomCaption\setPageObject}}%
740 % \fi
741 \fi
742 \or% caption on odd page 3->right page
743 \if@twoside
744 \if@twocolumn
745 \ifoddpage
746 \if@firstcolumn% on right side
747 \setBottomCaption\setPageObject
748 \else
749 \afterpage{\setPageObject\setBottomCaption}% start next column
750 \fi
751 \else% left (even) page
752 \if@firstcolumn
753 \afterpage{\setPageObject\setBottomCaption}% start next column
754 \else
755 \setPageObject\setBottomCaption
756 \fi
757 \fi
758 \else % onecolumn
759 \ifoddpage
760 \setPageObject\setBottomCaption
761 \else% even page
762 \afterpage{\setPageObject\setBottomCaption}%
763 \fi
764 \fi
765 \else % oneside
766 \if@twocolumn
767 \ifoddpage
768 \if@firstcolumn% on right side
769 \setBottomCaption\setPageObject
770 \else
771 \setPageObject\setBottomCaption
772 \fi
773 \else
774 \if@firstcolumn% on left side
775 \afterpage{\setPageObject\setBottomCaption}%
776 \else
777 \setPageObject\setBottomCaption
778 \fi
779 \fi
780 \else % onecolumn
781 \ifoddpage
782 \setBottomCaption\setPageObject
783 \else
784 \afterpage{\setBottomCaption\setPageObject}%
785 \fi
786 \fi
787 \fi
788 \or% caption on the inner column 4->inner
789 \set@caption@object
790 \if@twocolumn
791 \ifoddpage

```

24 The Package Source

```
792     \if@firstcolumn% on right side
793     \setBottomCaption\setPageObject
794     \else % right column on right side
795         \setPageObject\setBottomCaption% start next firstcolumn next page
796     \fi
797 \else
798     \if@firstcolumn% on left side
799         \afterpage{\afterpage{\setBottomCaption\setPageObject}}% start next page/first column
800     \else% left page/column
801         \setBottomCaption\setPageObject% start on same page/column
802     \fi
803 \fi
804 \else % onecolumn
805     \setBottomCaption\setPageObject
806 \fi
807 \or% caption on the outer column 5->outer
808 \set@caption@object
809 \if@twocolumn
810     \ifoddpage
811         \if@firstcolumn
812             \afterpage{\afterpage{\setBottomCaption\setPageObject}}%
813         \else
814             \afterpage{\setBottomCaption\setPageObject}%
815         \fi
816     \else% even page (left)
817         \if@firstcolumn
818             \setBottomCaption\setPageObject
819         \else
820
821         \fi
822     \fi
823 \else% onecolumn
824     \setBottomCaption\setPageObject
825 \fi
826 \or% caption after object on same page 6->right for twocolumn
827 \if@twocolumn
828     \if@firstcolumn
829         \afterpage{\setPageObject\setBottomCaption}%
830     \else
831         \setPageObject\setBottomCaption
832     \fi
833 \else% always caption _after_ object for onecolumn
834     \setPageObject\setBottomCaption
835 \fi
836 \or% caption before object on same page 7->left for twocolumn
837 \if@twocolumn
838     \if@firstcolumn
839         \setBottomCaption\setPageObject
840     \else
841         \afterpage{\setBottomCaption\setPageObject}
842     \fi
843 \else% onecolumn -> same as before
844     \setBottomCaption\setPageObject
```

```

845     \fi
846     \fi
847     \endgroup% startet at main \hvFloat
848 }%
849 %
850 \def\setBottomCaption{%
851     \begin{\hv@floatType}[!b]
852     \ifhv@separatorLine\drawSepLine\fi
853     \par
854     \usebox\hvCaptionBox
855     \end{\hv@floatType}%
856 }
857
858 \def\setPageObject{%
859     \ifhv@star
860         \begin{\hv@floatType*}[p]%
861     \else
862         \begin{\hv@floatType}[p]%
863     \fi
864     \ifhv@FULLPAGE
865         \vspace*{\the\dimexpr-\lin-\voffset-\topmargin-\headheight-\headsep}%-0.5\baselineskip}%
866         \checkoddpage
867         \if@twoside
868             \ifoddpage
869                 \hspace*{\the\dimexpr-\oddsidemargin-\parindent-\lin}%
870             \else
871                 \hspace*{\the\dimexpr-\evensidemargin-\parindent-\lin}%
872             \fi
873         \else
874             \hspace*{\the\dimexpr-\oddsidemargin-\parindent-\lin}%
875         \fi
876         %\put(0,0){
877         \AtBeginShipoutNext{\thispagestyle{empty}}%
878         \usebox\hvObjectBox}%
879     \else
880         \usebox\hvObjectBox
881     \fi
882     \ifhv@star
883         \end{\hv@floatType*}%
884     \else
885         \end{\hv@floatType}%
886     \fi
887 }
888
889 \ExplSyntaxOn
890
891 \def\getMultiCaptionAndLabel{%
892     \global\sbox\hvCaptionBox{\minipage[b]{\linewidth}%
893     \ifx\relax\hv@caption@format\relax\else\expandafter\captionsetup\expandafter{\hv@caption@format}\fi
894     \setlength\belowcaptionskip{5pt}%
895     \setlength\abovecaptionskip{0pt}%
896     \hv@cntb=\clist_count:N\l_clist_Type
897     \advance\hv@cntb by \@ne

```

24 The Package Source

```

898 \hv@cнта=1
899 \loop
900 \edef\@captype{\clist_item:Nn\l_clist_Type{\hv@cнта}}%
901 \edef\@tempa{\clist_item:Nn\l_clist_LofCaption{\hv@cнта}}%
902 \ifx\@tempa\@empty
903 \caption{\clist_item:Nn\l_clist_Caption{\hv@cнта}}%
904 \else
905 \expandafter\caption\expandafter[\@tempa]{\clist_item:Nn\l_clist_Caption{\hv@cнта}}%
906 \fi
907 \edef\@tempa{\clist_item:Nn\l_clist_Label{\hv@cнта}}%
908 \ifx\@tempa\@empty
909 \else
910 \expandafter\label\expandafter{\clist_item:Nn\l_clist_Label{\hv@cнта}-cap}\fi
911 \advance\hv@cнта by \@ne
912 \ifnum\hv@cнта<\hv@cнтb
913 \repeat
914 \endminipage}%
915 }
916 \def\getMultiObjectAndLabel{%
917 \global\sbox\hvObjectBox{\minipage{\linewidth}%
918 \ifx\relax\hv@caption@format\relax\else\expandafter\captionsetup\expandafter{\hv@caption@format}\fi
919 \ifx\hvSet@objectPos\hv@Right\raggedleft\else
920 \ifx\hvSet@objectPos\hv@Left\raggedleft\else
921 \ifx\hvSet@objectPos\hv@Center\centering
922 \fi\fi\fi
923 \hv@cнтb=\clist_count:N\l_clist_Type
924 \advance\hv@cнтb by \@ne
925 \hv@cнта=1
926 \loop
927 \def\@temp{\clist_item:Nn\l_clist_Object{\hv@cнта}}%
928 \ifhv@objectFrame\frame{\@temp}\else\@temp\fi
929 \edef\@tempa{\clist_item:Nn\l_clist_Label{\hv@cнта}}%
930 \ifx\@tempa\@empty
931 \else
932 \refstepcounter{\@captype}%
933 \expandafter\label\expandafter{\clist_item:Nn\l_clist_Label{\hv@cнта}}%
934 \fi
935 \ifnum\hv@cнта<\clist_count:N\l_clist_Type\par\hv@vskip\fi
936 \advance\hv@cнта by \@ne
937 \ifnum\hv@cнта<\hv@cнтb
938 \repeat
939 \endminipage}%
940 }
941
942 \def\getMultiSubCaptionAndLabel{%
943 \global\sbox\hvCaptionBox{\minipage{\linewidth}%
944 \ifx\relax\hv@caption@format\relax\else\expandafter\captionsetup\expandafter{\hv@caption@format}\fi
945 \setlength\belowcaptionskip{5pt}%
946 \setlength\abovecaptionskip{0pt}%
947 \xdef\@captype{\clist_item:Nn\l_clist_Type{1}}% the same for all subfloats
948 \edef\@tempa{\clist_item:Nn\l_clist_LofCaption{1}}%
949 \ifx\@tempa\@empty
950 \caption{\clist_item:Nn\l_clist_Caption{1}}%

```

```

951 \else
952 \expandafter\caption\expandafter[\@tempa]{\clist_item:Nn\l_clist_Caption{1}}%
953 \fi
954 \edef\@tempa{\clist_item:Nn\l_clist_Label{1}}%
955 \ifx\@tempa\@empty\else\expandafter\label\expandafter{\clist_item:Nn\l_clist_Label{1}-cap}\fi
956 \endminipage}%
957 }
958
959 \def\getMultiSubObjectAndLabel{%
960 \global\sbox\hvObjectBox{\minipage{\linewidth}}%
961 \ifx\relax\hv@subcaption@format\relax\else\captionsetup[sub]{\hv@subcaption@format}\fi
962 \ifx\hvSet@objectPos\hv@Right\raggedleft\else
963 \ifx\hvSet@objectPos\hv@Left\raggedleft\else
964 \ifx\hvSet@objectPos\hv@Center\centering
965 \fi\fi\fi
966 \hv@cntb=\clist_count:N\l_clist_Caption
967 \advance\hv@cntb by \@ne
968 \hv@canta=2
969 \xdef\@capttype{\clist_item:Nn\l_clist_Type{1}}% the same for all subfloats
970 \loop
971 \def\@temp{\clist_item:Nn\l_clist_Object{\hv@canta}}%
972 \ifhv@objectFrame\frame{\@temp}\else\@temp\fi
973 \begingroup
974 \edef\@tempa{\clist_item:Nn\l_clist_LofCaption{\hv@canta}}%
975 \ifx\@tempa\@empty
976 \subcaption{\clist_item:Nn\l_clist_Caption{\hv@canta}}%
977 \else
978 \expandafter\subcaption\expandafter[\@tempa]{\clist_item:Nn\l_clist_Caption{\hv@canta}}%
979 \fi
980 \edef\@tempa{\clist_item:Nn\l_clist_Label{\hv@canta}}%
981 \ifx\@tempa\@empty
982 \else
983 \expandafter\label\expandafter{\clist_item:Nn\l_clist_Label{\hv@canta}}%
984 \fi
985 \endgroup
986 \ifnum\hv@canta<\clist_count:N\l_clist_Type\par\hv@vskip\fi
987 \advance\hv@canta by \@ne
988 \ifnum\hv@canta<\hv@cntb
989 \repeat
990 \edef\@tempa{\clist_item:Nn\l_clist_Label{1}}% the main label at the end
991 \ifx\@tempa\@empty
992 \else
993 \refstepcounter{\@capttype}
994 \expandafter\label\expandafter{\@tempa}%
995 \fi
996 \endminipage}%
997 }
998 \ExplSyntaxOff
999
1000 \def\getSingleCaptionAndLabel{%
1001 \global\sbox\hvCaptionBox{\minipage{\linewidth}}%
1002 \ifx\relax\hv@caption@format\relax\else\expandafter\captionsetup\expandafter{\hv@caption@format}\fi
1003 \setlength\belowcaptionskip{5pt}%

```

24 The Package Source

```
1004 \setlength\abovecaptionskip{0pt}%
1005 \edef\@capttype{\hv@floatType}%
1006 \expandafter\ifx\expandafter\relax\hv@shortCap\relax
1007 \caption{\hv@longCap}%
1008 \else
1009 \caption[\hv@shortCap]{\hv@longCap}%
1010 \fi
1011 \expandafter\ifx\expandafter\relax\hv@label\relax\else\label{\hv@label-cap}\fi
1012 \endminipage}%
1013 }
1014
1015 \def\set@caption@object{% first caption, then object
1016 \ifhv@multiFloat
1017 \getMultiCaptionAndLabel
1018 \else
1019 \ifhv@subFloat
1020 \getMultiSubCaptionAndLabel
1021 \else
1022 \getSingleCaptionAndLabel
1023 \fi
1024 \fi
1025 \edef\@capttype{hv@p\hv@floatType}%
1026 \ifhv@multiFloat
1027 \getMultiObjectAndLabel
1028 \else
1029 \ifhv@subFloat
1030 \getMultiSubObjectAndLabel
1031 \else
1032 \global\sbox\hvObjectBox{%
1033 \refstepcounter{\@capttype}%
1034 \ifhv@objectFrame\frame{\hv@floatObject}\else\hv@floatObject\fi
1035 \expandafter\ifx\expandafter\relax\hv@label\relax
1036 \else
1037 \expandafter\label\expandafter{\hv@label}%
1038 \fi
1039 }%
1040 \fi
1041 \fi
1042 }
1043 %
1044 \endinput
```